



Product Service

CERTIFICATE

No. Z2 072092 0295 Rev. 51

Holder of Certificate: Shanghai JA Solar Technology Co., Ltd.
No. 118, Lane 3111
West Huancheng Road
Fengxian District
201401 Shanghai
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:



Product: Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061604115-66

Valid until: 2027-11-21

Date, 2022-11-23

(Zhulin Zhang)

CERTIFICATE

No. Z2 072092 0295 Rev. 51

Model(s):

1500 V DC Maximum System voltage, Fire Safety Class A or C Modules:
 JAM72D00-xxx/BP/1500V, JAM72D00-xxx/BP, xxx= 330 to 385 in steps of 5;
 JAM60D00-xxx/BP/1500V, JAM60D00-xxx/BP, xxx= 275 to 320 in steps of 5;
 JAM60D00-xxx/PR/1500V, JAM60D00-xxx/PR, xxx= 285 to 320 in steps of 5;
 JAM72D00-xxx/PR/1500V, JAM72D00-xxx/PR, xxx= 340 to 385 in steps of 5;
 JAM60D00-xxx/MB/1500V, JAM60D00-xxx/MB, xxx= 310 to 315 in steps of 5;
 JAM72D00-xxx/MB/1500V, JAM72D00-xxx/MB, xxx= 370 to 380 in steps of 5;
 JAM72D09-xxx/BP/1500V, JAM72D09-xxx/BP, xxx= 360 to 400 in steps of 5;
 JAM60D09-xxx/BP/1500V, JAM60D09-xxx/BP, xxx= 300 to 340 in steps of 5;
 JAM72D10-xxx/MB/1500V, JAM72D10-xxx/MB, xxx= 385 to 430 in steps of 5;
 JAM60D10-xxx/MB/1500V, JAM60D10-xxx/MB, xxx= 320 to 355 in steps of 5;
 JAM72D10-xxx/BP/1500V, JAM72D10-xxx/BP, xxx= 385 to 415 in steps of 5;
 JAM60D10-xxx/BP/1500V, JAM60D10-xxx/BP, xxx= 300 to 340 in steps of 5;
 JAM66D10-xxx/MB/1500V, JAM66D10-xxx/MB, xxx= 360 to 380 in steps of 5;
 JAM78D10-xxx/MB/1500V, JAM78D10-xxx/MB, xxx= 435 to 455 in steps of 5;
 JAM72D20-xxx/MB/1500V, JAM72D20-xxx/MB, xxx= 430 to 465 in steps of 5;
 JAM60D20-xxx/MB/1500V, JAM60D20-xxx/MB, xxx= 355 to 385 in steps of 5;
 JAM72D10-xxx/TB/1500V, JAM72D10-xxx/TB, xxx= 400 to 420 in steps of 5;
 JAM60D10-xxx/TB/1500V, JAM60D10-xxx/TB, xxx= 335 to 350 in steps of 5;
 JAM78D30-xxx/MB/1500V, JAM78D30-xxx/MB, xxx= 580 to 605 in steps of 5;
 JAM72D30-xxx/MB/1500V, JAM72D30-xxx/MB, xxx= 505 to 555 in steps of 5;
 JAM72D30-xxx/MB/F/1500V, JAM72D30-xxx/MB/F, xxx= 505 to 555 in steps of 5;
 JAM66D30-xxx/MB/1500V, JAM66D30-xxx/MB, xxx= 465 to 505 in steps of 5;
 JAM66D30-xxx/MB/F/1500V, JAM66D30-xxx/MB/F, xxx= 465 to 505 in steps of 5;
 JAM60D30-xxx/MB/1500V, JAM60D30-xxx/MB, xxx= 435 to 460 in steps of 5;
 JAM54D30-xxx/MB/1500V, JAM54D30-xxx/MB, xxx= 390 to 415 in steps of 5;
 JAM54D31-xxx/MB/1500V, JAM54D31-xxx/MB, xxx= 395 to 400 in steps of 5;
 JAM50D40-xxx/MB/1500V, JAM50D40-xxx/MB, xxx= 485 to 500 in steps of 5;
 JAM78D30-xxx/GB/1500V, JAM78D30-xxx/GB, xxx= 585 to 595 in steps of 5;
 JAM72D30-xxx/GB/1500V, JAM72D30-xxx/GB, xxx= 540 to 560 in steps of 5;
 JAM66D30-xxx/GB/1500V, JAM66D30-xxx/GB, xxx= 495 to 510 in steps of 5;
 JAM60D30-xxx/GB/1500V, JAM60D30-xxx/GB, xxx= 450 to 465 in steps of 5;
 JAM54D30-xxx/GB/1500V, JAM54D30-xxx/GB, xxx= 405 to 420 in steps of 5;
 JAM54D31-xxx/GB/1500V, JAM54D31-xxx/GB, xxx= 410 to 420 in steps of 5;
 JAM72D30-xxx/HB/1500V, JAM72D30-xxx/HB, xxx= 530 to 560 in steps of 5;
 JAM78D40-xxx/MB/1500V, JAM78D40-xxx/MB, xxx= 580 to 610 in steps of 5;
 JAM72D40-xxx/MB/1500V, JAM72D40-xxx/MB, xxx= 540 to 560 in steps of 5;
 JAM66D40-xxx/MB/1500V, JAM66D40-xxx/MB, xxx= 500 to 515 in steps of 5;
 JAM60D40-xxx/MB/1500V, JAM60D40-xxx/MB, xxx= 455 to 470 in steps of 5;
 JAM54D40-xxx/MB/1500V, JAM54D40-xxx/MB, xxx= 405 to 420 in steps of 5;
 JAM78D40-xxx/GB/1500V, JAM78D40-xxx/GB, xxx= 580 to 635 in steps of 5;
 JAM72D40-xxx/GB/1500V, JAM72D40-xxx/GB, xxx= 540 to 585 in steps of 5;
 JAM66D40-xxx/GB/1500V, JAM66D40-xxx/GB, xxx= 500 to 535 in steps of 5;
 JAM60D40-xxx/GB/1500V, JAM60D40-xxx/GB, xxx= 455 to 485 in steps of 5;
 JAM54D40-xxx/GB/1500V, JAM54D40-xxx/GB, xxx= 405 to 440 in steps of 5;
 JAM54D41-xxx/GB/1500V, JAM54D41-xxx/GB, xxx= 415 to 435 in steps of 5;

1000 V DC Maximum System voltage, Fire Safety Class C Modules:

JAM6(K)-72-xxx/PR, xxx= 345 to 370 in steps of 5;
 JAM6(K)-60-xxx/PR, xxx= 285 to 310 in steps of 5;
 JAM6(K)-72-xxx/4BB, xxx= 320 to 345 in steps of 5;
 JAM6(K)-60-xxx/4BB, xxx= 265 to 285 in steps of 5;
 JAM72S01-xxx/SC/1000V, xxx= 320 to 365 in steps of 5;
 JAM60S01-xxx/SC/1000V, xxx= 265 to 305 in steps of 5;
 JAM72S01-xxx/PR/1000V, xxx= 345 to 390 in steps of 5;
 JAM60S01-xxx/PR/1000V, xxx= 285 to 325 in steps of 5;
 JAM72S01-xxx/MR/1000V, xxx= 365 to 385 in steps of 5;
 JAM60S01-xxx/MR/1000V, xxx= 305 to 320 in steps of 5;
 JAM72S03-xxx/PR/1000V, xxx= 360 to 395 in steps of 5;
 JAM60S03-xxx/PR/1000V, xxx= 300 to 330 in steps of 5;
 JAM72S09-xxx/PR/1000V, xxx= 370 to 405 in steps of 5;
 JAM60S09-xxx/PR/1000V, xxx= 310 to 335 in steps of 5;
 JAM72S10-xxx/PR/1000V, xxx= 380 to 410 in steps of 5;
 JAM60S10-xxx/PR/1000V, xxx= 315 to 345 in steps of 5;
 JAM72S10-xxx/MR/1000V, xxx= 390 to 430 in steps of 5;
 JAM60S10-xxx/MR/1000V, xxx= 325 to 355 in steps of 5;
 JAM60S10-xxx/MR-L/1000V, xxx= 325 to 355 in steps of 5;

CERTIFICATE

No. Z2 072092 0295 Rev. 51

JAM78S10-xxx/MR/1000V, xxx= 435 to 465 in steps of 5;
 JAM66S10-xxx/MR/1000V, xxx= 345 to 390 in steps of 5;
 JAM72S09-xxx/BP/1000V, xxx= 375 to 385 in steps of 5;
 JAM60S09-xxx/BP/1000V, xxx= 315 to 320 in steps of 5;
 JAM72S10-xxx/BP/1000V, xxx= 385 to 400 in steps of 5;
 JAM60S10-xxx/BP/1000V, xxx= 320 to 330 in steps of 5;
 JAM72S02-xxx/PR/1000V, xxx= 345 to 390 in steps of 5;
 JAM60S02-xxx/PR/1000V, xxx= 285 to 325 in steps of 5;
 JAM72S02-xxx/SC/1000V, xxx= 320 to 365 in steps of 5;
 JAM60S02-xxx/SC/1000V, xxx= 265 to 305 in steps of 5;
 JAM72S02-xxx/MR/1000V, xxx= 365 to 385 in steps of 5;
 JAM60S02-xxx/MR/1000V, xxx= 305 to 320 in steps of 5;
 JAM72S08-xxx/PR/1000V, xxx= 360 to 395 in steps of 5;
 JAM60S08-xxx/PR/1000V, xxx= 300 to 330 in steps of 5;
 JAM72S12-xxx/PR/1000V, xxx= 365 to 385 in steps of 5;
 JAM60S12-xxx/PR/1000V, xxx= 305 to 330 in steps of 5;
 JAM72S17-xxx/PR/1000V, xxx= 380 to 390 in steps of 5;
 JAM60S17-xxx/PR/1000V, xxx= 315 to 325 in steps of 5;
 JAM72S17-xxx/MR/1000V, xxx= 390 to 430 in steps of 5;
 JAM60S17-xxx/MR/1000V, xxx= 315 to 355 in steps of 5;
 JAM72S10-xxx/MB/1000V, xxx= 395 to 415 in steps of 5;
 JAM60S10-xxx/MB/1000V, xxx= 330 to 345 in steps of 5;
 JAM72S20-xxx/MR/1000V, xxx= 430 to 470 in steps of 5;
 JAM60S20-xxx/MR/1000V, xxx= 355 to 390 in steps of 5;
 JAM78S30-xxx/MR/1000V, xxx= 580 to 605 in steps of 5;
 JAM72S30-xxx/MR/1000V, xxx= 510 to 555 in steps of 5;
 JAM66S30-xxx/MR/1000V, xxx= 470 to 505 in steps of 5;
 JAM60S30-xxx/MR/1000V, xxx= 435 to 460 in steps of 5;
 JAM54S30-xxx/MR/1000V, xxx= 390 to 425 in steps of 5;
 JAM60S21-xxx/MR/1000V, xxx= 355 to 390 in steps of 5;
 JAM50S40-xxx/MR/1000V, xxx= 490 to 500 in steps of 5;
 JAM72S20-xxx/MB/1000V, xxx= 450 to 465 in steps of 5;
 JAM60S20-xxx/MB/1000V, xxx= 375 to 390 in steps of 5;
 JAM72S31-xxx/MR/1000V, xxx= 510 to 545 in steps of 5;
 JAM66S31-xxx/MR/1000V, xxx= 470 to 500 in steps of 5;
 JAM60S31-xxx/MR/1000V, xxx= 425 to 450 in steps of 5;
 JAM54S31-xxx/MR/1000V, xxx= 385 to 405 in steps of 5;
 JAM76S11-xxx/PR(B)/1000V, xxx= 395 to 415 in steps of 5;
 JAM78S30-xxx/GR/1000V, xxx= 575 to 600 in steps of 5;
 JAM72S30-xxx/GR/1000V, xxx= 535 to 560 in steps of 5;
 JAM66S30-xxx/GR/1000V, xxx= 500 to 510 in steps of 5;
 JAM60S30-xxx/GR/1000V, xxx= 445 to 465 in steps of 5;
 JAM54S30-xxx/GR/1000V, xxx= 400 to 420 in steps of 5;
 JAM78S31-xxx/GR/1000V, xxx= 570 to 590 in steps of 5;
 JAM72S31-xxx/GR/1000V, xxx= 525 to 545 in steps of 5;
 JAM66S31-xxx/GR/1000V, xxx= 480 to 500 in steps of 5;
 JAM60S31-xxx/GR/1000V, xxx= 430 to 450 in steps of 5;
 JAM54S31-xxx/GR/1000V, xxx= 395 to 405 in steps of 5;
 JAM72S17-xxx/GR/1000V, xxx= 385 to 400 in steps of 5;
 JAM72S40-xxx/GR/1000V, xxx= 540 to 575 in steps of 5;
 JAM66S40-xxx/GR/1000V, xxx= 495 to 525 in steps of 5;
 JAM60S40-xxx/GR/1000V, xxx= 450 to 480 in steps of 5;
 JAM54S40-xxx/GR/1000V, xxx= 405 to 430 in steps of 5;
 JAM72S41-xxx/GR/1000V, xxx= 540 to 570 in steps of 5;
 JAM66S41-xxx/GR/1000V, xxx= 495 to 525 in steps of 5;
 JAM60S41-xxx/GR/1000V, xxx= 450 to 475 in steps of 5;
 JAM54S41-xxx/GR/1000V, xxx= 405 to 430 in steps of 5;

1000 V DC or 1500 V DC Maximum System voltage, Fire Safety Class C
 Modules:

JAM72S01-xxx/SC, xxx= 320 to 365 in steps of 5;
 JAM60S01-xxx/SC, xxx= 265 to 305 in steps of 5;
 JAM60S01-xxx/PR, xxx= 285 to 325 in steps of 5;
 JAM72S01-xxx/MR, xxx= 365 to 385 in steps of 5;
 JAM60S01-xxx/MR, xxx= 305 to 320 in steps of 5;
 JAM72S03-xxx/PR, xxx= 360 to 395 in steps of 5;
 JAM60S03-xxx/PR, xxx= 300 to 330 in steps of 5;
 JAM72S09-xxx/PR, xxx= 370 to 405 in steps of 5;
 JAM60S09-xxx/PR, xxx= 310 to 335 in steps of 5;
 JAM72S10-xxx/PR, xxx= 380 to 410 in steps of 5;

CERTIFICATE

No. Z2 072092 0295 Rev. 51

JAM60S10-xxx/PR, xxx= 315 to 345 in steps of 5;
 JAM72S10-xxx/MR, xxx= 390 to 430 in steps of 5;
 JAM60S10-xxx/MR, xxx= 325 to 355 in steps of 5;
 JAM60S10-xxx/MR-L, xxx= 325 to 355 in steps of 5;
 JAM78S10-xxx/MR, xxx= 435 to 465 in steps of 5;
 JAM66S10-xxx/MR, xxx= 345 to 390 in steps of 5;
 JAM72S09-xxx/BP, xxx= 375 to 385 in steps of 5;
 JAM60S09-xxx/BP, xxx= 315 to 320 in steps of 5;
 JAM72S10-xxx/BP, xxx= 385 to 400 in steps of 5;
 JAM60S10-xxx/BP, xxx= 320 to 330 in steps of 5;
 JAM72S02-xxx/PR, xxx= 345 to 390 in steps of 5;
 JAM60S02-xxx/PR, xxx= 285 to 325 in steps of 5;
 JAM72S02-xxx/SC, xxx= 320 to 365 in steps of 5;
 JAM60S02-xxx/SC, xxx= 265 to 305 in steps of 5;
 JAM72S02-xxx/MR, xxx= 365 to 385 in steps of 5;
 JAM60S02-xxx/MR, xxx= 305 to 320 in steps of 5;
 JAM72S08-xxx/PR, xxx= 360 to 395 in steps of 5;
 JAM60S08-xxx/PR, xxx= 300 to 330 in steps of 5;
 JAM72S12-xxx/PR, xxx= 365 to 385 in steps of 5;
 JAM60S12-xxx/PR, xxx= 305 to 330 in steps of 5;
 JAM72S17-xxx/PR, xxx= 380 to 390 in steps of 5;
 JAM60S17-xxx/PR, xxx= 315 to 325 in steps of 5;
 JAM72S17-xxx/MR, xxx= 390 to 430 in steps of 5;
 JAM60S17-xxx/MR, xxx= 315 to 355 in steps of 5;
 JAM72S10-xxx/MB, xxx= 395 to 415 in steps of 5;
 JAM60S10-xxx/MB, xxx= 330 to 345 in steps of 5;
 JAM72S20-xxx/MR, xxx= 430 to 470 in steps of 5;
 JAM60S20-xxx/MR, xxx= 355 to 390 in steps of 5;
 JAM78S10-xxx/MR-J, xxx= 435 to 465 in steps of 5;
 JAM78S30-xxx/MR, xxx= 580 to 605 in steps of 5;
 JAM72S30-xxx/MR, xxx= 510 to 555 in steps of 5;
 JAM66S30-xxx/MR, xxx= 470 to 505 in steps of 5;
 JAM60S30-xxx/MR, xxx= 435 to 460 in steps of 5;
 JAM54S30-xxx/MR, xxx= 390 to 425 in steps of 5;
 JAM60S21-xxx/MR, xxx= 355 to 390 in steps of 5;
 JAM50S40-xxx/MR, xxx= 490 to 500 in steps of 5;
 JAM72S20-xxx/MB, xxx= 450 to 465 in steps of 5;
 JAM60S20-xxx/MB, xxx= 375 to 390 in steps of 5;
 JAM68S11-xxx/PR, xxx= 355 to 365 in steps of 5;
 JAM68S11-xxx/PR(B), xxx= 345 to 365 in steps of 5;
 JAM72S31-xxx/MR, xxx= 510 to 545 in steps of 5;
 JAM66S31-xxx/MR, xxx= 470 to 500 in steps of 5;
 JAM60S31-xxx/MR, xxx= 425 to 450 in steps of 5;
 JAM54S31-xxx/MR, xxx= 385 to 405 in steps of 5;
 JAM76S11-xxx/PR(B), xxx= 395 to 415 in steps of 5;
 JAM78S30-xxx/GR, xxx= 575 to 600 in steps of 5;
 JAM72S30-xxx/GR, xxx= 535 to 560 in steps of 5;
 JAM66S30-xxx/GR, xxx= 500 to 510 in steps of 5;
 JAM60S30-xxx/GR, xxx= 445 to 465 in steps of 5;
 JAM54S30-xxx/GR, xxx= 400 to 420 in steps of 5;
 JAM78S31-xxx/GR, xxx= 570 to 590 in steps of 5;
 JAM72S31-xxx/GR, xxx= 525 to 545 in steps of 5;
 JAM66S31-xxx/GR, xxx= 480 to 500 in steps of 5;
 JAM60S31-xxx/GR, xxx= 435 to 450 in steps of 5;
 JAM54S31-xxx/GR, xxx= 395 to 405 in steps of 5;
 JAM72S17-xxx/GR, xxx= 385 to 400 in steps of 5;
 JAM72S40-xxx/GR, xxx= 540 to 575 in steps of 5;
 JAM66S40-xxx/GR, xxx= 495 to 525 in steps of 5;
 JAM60S40-xxx/GR, xxx= 450 to 480 in steps of 5;
 JAM54S40-xxx/GR, xxx= 405 to 430 in steps of 5;
 JAM72S41-xxx/GR, xxx= 540 to 570 in steps of 5;
 JAM66S41-xxx/GR, xxx= 495 to 525 in steps of 5;
 JAM60S41-xxx/GR, xxx= 450 to 475 in steps of 5;
 JAM54S41-xxx/GR, xxx= 405 to 430 in steps of 5;

1500 V DC Maximum System voltage, Fire Safety Class C Modules:

JAM6(K)-72-xxx/PR/1500V, xxx= 345 to 370 in steps of 5;

JAM6(K)-60-xxx/PR/1500V, xxx= 285 to 310 in steps of 5;

JAM6(K)-72-xxx/4BB/1500V, xxx= 320 to 345 in steps of 5;

CERTIFICATE

No. Z2 072092 0295 Rev. 51

JAM6(K)-60-xxx/4BB/1500V, xxx= 265 to 285 in steps of 5;
 JAM72S01-xxx/SC/1500V, xxx= 320 to 365 in steps of 5;
 JAM60S01-xxx/SC/1500V, xxx= 265 to 305 in steps of 5;
 JAM72S01-xxx/PR, xxx= 345 to 390 in steps of 5;
 JAM60S01-xxx/PR/1500V, xxx= 285 to 325 in steps of 5;
 JAM72S01-xxx/MR/1500V, xxx= 365 to 385 in steps of 5;
 JAM60S01-xxx/MR/1500V, xxx= 305 to 320 in steps of 5;
 JAM72S03-xxx/PR/1500V, xxx= 360 to 395 in steps of 5;
 JAM60S03-xxx/PR/1500V, xxx= 300 to 330 in steps of 5;
 JAM72S09-xxx/PR/1500V, xxx= 370 to 405 in steps of 5;
 JAM60S09-xxx/PR/1500V, xxx= 310 to 335 in steps of 5;
 JAM72S10-xxx/PR/1500V, xxx= 380 to 410 in steps of 5;
 JAM60S10-xxx/PR/1500V, xxx= 315 to 345 in steps of 5;
 JAM72S10-xxx/MR/1500V, xxx= 390 to 430 in steps of 5;
 JAM60S10-xxx/MR/1500V, xxx= 325 to 355 in steps of 5;
 JAM60S10-xxx/MR-L/1500V, xxx= 325 to 355 in steps of 5;
 JAM78S10-xxx/MR/1500V, xxx= 435 to 465 in steps of 5;
 JAM66S10-xxx/MR/1500V, xxx= 345 to 390 in steps of 5;
 JAM72S09-xxx/BP/1500V, xxx= 375 to 385 in steps of 5;
 JAM60S09-xxx/BP/1500V, xxx= 315 to 320 in steps of 5;
 JAM72S10-xxx/BP/1500V, xxx= 385 to 400 in steps of 5;
 JAM60S10-xxx/BP/1500V, xxx= 320 to 330 in steps of 5;
 JAM72S02-xxx/PR/1500V, xxx= 345 to 390 in steps of 5;
 JAM60S02-xxx/PR/1500V, xxx= 285 to 325 in steps of 5;
 JAM72S02-xxx/SC/1500V, xxx= 320 to 365 in steps of 5;
 JAM60S02-xxx/SC/1500V, xxx= 265 to 305 in steps of 5;
 JAM72S02-xxx/MR/1500V, xxx= 365 to 385 in steps of 5;
 JAM60S02-xxx/MR/1500V, xxx= 305 to 320 in steps of 5;
 JAM72S08-xxx/PR/1500V, xxx= 360 to 395 in steps of 5;
 JAM60S08-xxx/PR/1500V, xxx= 300 to 330 in steps of 5;
 JAM72S12-xxx/PR/1500V, xxx= 365 to 385 in steps of 5;
 JAM60S12-xxx/PR/1500V, xxx= 305 to 330 in steps of 5;
 JAM72S17-xxx/PR/1500V, xxx= 380 to 390 in steps of 5;
 JAM60S17-xxx/PR/1500V, xxx= 315 to 325 in steps of 5;
 JAM72S17-xxx/MR/1500V, xxx= 390 to 430 in steps of 5;
 JAM60S17-xxx/MR/1500V, xxx= 315 to 355 in steps of 5;
 JAM72S10-xxx/MB/1500V, xxx= 395 to 415 in steps of 5;
 JAM60S10-xxx/MB/1500V, xxx= 330 to 345 in steps of 5;
 JAM72S20-xxx/MR/1500V, xxx= 430 to 470 in steps of 5;
 JAM60S20-xxx/MR/1500V, xxx= 355 to 390 in steps of 5;
 JAM78S30-xxx/MR/1500V, xxx= 580 to 605 in steps of 5;
 JAM72S30-xxx/MR/1500V, xxx= 510 to 555 in steps of 5;
 JAM66S30-xxx/MR/1500V, xxx= 470 to 505 in steps of 5;
 JAM60S30-xxx/MR/1500V, xxx= 435 to 460 in steps of 5;
 JAM54S30-xxx/MR/1500V, xxx= 390 to 425 in steps of 5;
 JAM60S21-xxx/MR/1500V, xxx= 355 to 390 in steps of 5;
 JAM50S40-xxx/MR/1500V, xxx= 490 to 500 in steps of 5;
 JAM72S20-xxx/MB/1500V, xxx= 450 to 465 in steps of 5;
 JAM60S20-xxx/MB/1500V, xxx= 375 to 390 in steps of 5;
 JAM72S31-xxx/MR/1500V, xxx= 510 to 545 in steps of 5;
 JAM66S31-xxx/MR/1500V, xxx= 470 to 500 in steps of 5;
 JAM60S31-xxx/MR/1500V, xxx= 425 to 450 in steps of 5;
 JAM54S31-xxx/MR/1500V, xxx= 385 to 405 in steps of 5;
 JAM76S11-xxx/PR(B)/1500V, xxx= 395 to 415 in steps of 5;
 JAM78S30-xxx/GR/1500V, xxx= 575 to 600 in steps of 5;
 JAM72S30-xxx/GR/1500V, xxx= 535 to 560 in steps of 5;
 JAM66S30-xxx/GR/1500V, xxx= 500 to 510 in steps of 5;
 JAM60S30-xxx/GR/1500V, xxx= 445 to 465 in steps of 5;
 JAM54S30-xxx/GR/1500V, xxx= 400 to 420 in steps of 5;
 JAM78S31-xxx/GR/1500V, xxx= 570 to 590 in steps of 5;
 JAM72S31-xxx/GR/1500V, xxx= 525 to 545 in steps of 5;
 JAM66S31-xxx/GR/1500V, xxx= 480 to 500 in steps of 5;
 JAM60S31-xxx/GR/1500V, xxx= 435 to 450 in steps of 5;
 JAM54S31-xxx/GR/1500V, xxx= 395 to 405 in steps of 5;
 JAM72S17-xxx/GR/1500V, xxx= 385 to 400 in steps of 5;
 JAM72S40-xxx/GR/1500V, xxx= 540 to 575 in steps of 5;
 JAM66S40-xxx/GR/1500V, xxx= 495 to 525 in steps of 5;
 JAM60S40-xxx/GR/1500V, xxx= 450 to 480 in steps of 5;
 JAM54S40-xxx/GR/1500V, xxx= 405 to 430 in steps of 5;
 JAM72S41-xxx/GR/1500V, xxx= 540 to 570 in steps of 5;

CERTIFICATE

No. Z2 072092 0295 Rev. 51

JAM66S41-xxx/GR/1500V, xxx= 495 to 525 in steps of 5;
JAM60S41-xxx/GR/1500V, xxx= 450 to 475 in steps of 5;
JAM54S41-xxx/GR/1500V, xxx= 405 to 430 in steps of 5;

xxx is standing for rated output power at STC

Parameters:

Construction:	Framed or Frameless, with Junction box, Cable and Connectors.
Test Laboratory:	Yangzhou Opto-Electrical Products Testing Institute No. 10 West Kaifa Road, Yangzhou 225009 Jiangsu, P. R. China
Safety Class:	Class II
Maximum System Voltage:	1500 V DC or 1000 V DC
Fire Safety Class:	Class C or Class A according to UL790.
Production Facility(ies):	079395, 095903, 090968, 108746, 072092, 109998, 112017, 113943, 114922, 001783, 004170, 113691.

Tested according to:

IEC 61215-1:2016
EN 61215-1:2016
IEC 61215-1-1:2016
EN 61215-1-1:2016
IEC 61215-2:2016
EN 61215-2:2017
IEC 61730-1:2016
EN IEC 61730-1:2018
EN IEC 61730-1:2018/AC:2018-06
IEC 61730-2:2016
EN IEC 61730-2:2018
EN IEC 61730-2:2018/AC:2018-06

CERTIFICATE

TÜV NORD CERT GmbH
herewith declares that

Shanghai JA Solar Technology Co., Ltd.
No. 118, Lane 3111, West Huancheng Road,
Fengxian District, Shanghai, 201401,
P.R. China

is authorized to provide the product mentioned below with the mark as illustrated:



Description of product (details see Annex 2):

Crystalline Silicon Terrestrial Photovoltaic (PV) Modules

Valid until: 2024-05-13

Certification program:	P12-VA-01 Rev. 17 09.20
Certification fundamental(s):	IEC 62716:2013 / EN 62716:2013 + AC:2014.
Registered No.:	44 780 20 406749 - 026R8A5M10
Manufacturer:	see Annex 1
Test Report No.:	492010517.024
File No.:	PVP08030/22P-02



TÜV NORD CERT GmbH
Certification Body
Consumer Products



Essen, 2022-12-01

Please also pay attention to the information stated overleaf.

Manufacturer:

Manufacturer 1:	Shanghai JA Solar Technology Co., Ltd. No. 118, Lane 3111, West Huancheng Road, Fengxian District Shanghai 201401, P.R. China
Factory inspection report no.:	862010153.010
Manufacturer 2:	Hefei JA Solar Technology Co., Ltd. No. 999, Chang Ning Road, Hi-tech Zone, Hefei 230088, P.R. China
Factory inspection report no.:	862010241.009
Manufacturer 3:	JA Solar (Xingtai) Co., Ltd. No. 1688, Chang An Road, Xingtai Economic Development Area Xingtai City, Hebei Province, 054001, P.R. China
Factory inspection report no.:	862010290.007
Manufacturer 4:	Vina Solar Technology Co., Ltd. E12 factory, lot CN-03, Van Trung Industrial park 21000 Bac Giang Province, Vietnam
Factory inspection report no.:	862010302.006
Manufacturer 5:	JA Solar New Energy Yangzhou Co., Ltd. No.1, Jianhua Road, Economic Development Zone Yangzhou, Jiangsu Province, 225000, P.R. China
Factory inspection report no.:	862010496.003
Manufacturer 6:	Yiwu JA Solar Technology Co., Ltd. No. 165, Tongze Road, Yiting Town, Yiwu City, Zhejiang Province, 322000, P.R. China.
Factory inspection report no.:	862010513.003



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Manufacturer 7: **JA Solar Viet Nam Company Limited**
Lot G, Quang Chau Industrial Zone, Quang Chau Commune
Viet Yen Dist, 236110 Bac Giang Province, VIETNAM.

Factory inspection report no.: 862010560.002

Manufacturer 8: **JA Solar New Energy Yangzhou Co., Ltd. (Jingshan Park)**
No.123, Jinshan Road, Economic Development Zone,
Yangzhou, Jiangsu Province, 225127, P.R. China

Factory inspection report no.: 862010584.002

Remark:

Factory inspection is mandatory to be performed annually. Please refer to factory inspection report for detailed information.



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Description of product(s):

Module types:

PV Modules with Mono-crystalline Silicon Solar Cells (156mm to 158.75mm):

72 cells: JAM6(L)-72- xxx (xxx=295-335, in steps of 5)
72 cells: JAM6-72- xxx/SI (xxx=285-325, in steps of 5)
72 cells: JAM6(R)-72-xxx (xxx=295-340, in steps of 5)
72 cells: JAM6(R)-72-xxx/PR (xxx=330-350, in steps of 5)
72 cells: JAM6-72-xxx/PR (xxx=325-345, in steps of 5)
72 cells: JAM6(L)-72-xxx/PR (xxx=325-345, in steps of 5)
72 cells: JAM6(K)-72-xxx/4BB (xxx=320-345, in steps of 5)
72 cells: JAM6(K)-72-xxx/PR (xxx=325-370, in steps of 5)
72 cells: JAM72S02-xxx/PR (xxx=325-390, in steps of 5)
72 cells: JAM72S01-xxx/PR/1000V (xxx=345-390, in steps of 5)
72 cells: JAM72S01-xxx/SC/1000V (xxx=320-365, in steps of 5)
72 cells: JAM72S01-xxx/MR/1000V (xxx=365-385, in steps of 5)
72 cells: JAM72S09-xxx/PR/1000V (xxx=370-405, in steps of 5)
72 cells: JAM72S09-xxx/BP/1000V (xxx=375-385, in steps of 5)
72 cells: JAM72S02-xxx/PR/1000V (xxx=345-390, in steps of 5)
72 cells: JAM72S02-xxx/SC/1000V (xxx=320-365, in steps of 5)
72 cells: JAM72S02-xxx/MR/1000V (xxx=365-385, in steps of 5)
72 cells: JAM72S12-xxx/PR/1000V (xxx=365-385, in steps of 5)
60 cells: JAM6(L)-60-xxx (xxx=255-280, in steps of 5)
60 cells: JAM6-60-xxx/SI (xxx=235-280, in steps of 5)
60 cells: JAM6(FA)-60-xxx/SI (xxx=255-275, in steps of 5)
60 cells: JAM6(R)(FA)-60-xxx (xxx=260-280, in steps of 5)
60 cells: JAM6(R)-60-xxx (xxx=255-280, in steps of 5)
60 cells: JAM6(R)-60-xxx/PR (xxx=280-300, in steps of 5)
60 cells: JAM6-60-xxx/PR (xxx=275-295, in steps of 5)
60 cells: JAM6(L)-60-xxx/PR (xxx=270-295, in steps of 5)
60 cells: JAM6(K)-60-xxx/4BB (xxx=265-285, in steps of 5)
60 cells: JAM6(K)-60-xxx/PR (xxx=275-310, in steps of 5)
60 cells: JAM60S02-xxx/PR (xxx=280-325, in steps of 5)
60 cells: JAM60S01-xxx/PR/1000V (xxx=285-325, in steps of 5)
60 cells: JAM60S01-xxx/SC/1000V (xxx=265-305, in steps of 5)
60 cells: JAM60S01-xxx/MR/1000V (xxx=305-320, in steps of 5)
60 cells: JAM60S09-xxx/PR/1000V (xxx=310-335, in steps of 5)
60 cells: JAM60S09-xxx/BP/1000V (xxx=315-320, in steps of 5)
60 cells: JAM60S02-xxx/PR/1000V (xxx=285-325, in steps of 5)
60 cells: JAM60S02-xxx/SC/1000V (xxx=265-305, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

60 cells: JAM60S02-xxx/MR/1000V (xxx=305-320, in steps of 5)
60 cells: JAM60S12-xxx/PR/1000V (xxx=305-330, in steps of 5)
48 cells: JAM6(FA)-48-xxx/SI (xxx=205-220, in steps of 5)
48 cells: JAM6(R)(FA)-48-xxx (xxx=210-225, in steps of 5)
48 cells: JAM6(R)-48-xxx/PR (xxx=220-235, in steps of 5)
48 cells: JAM6-48-xxx/PR (xxx=215-235, in steps of 5)
48 cells: JAM6(L)-48-xxx/PR (xxx=215-235, in steps of 5)
48 cells: JAM6(K)-48xxx/4BB (xxx=210-225, in steps of 5)
48 cells: JAM6(K)-48-xxx/PR (xxx=220-235, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with 125mm Mono-crystalline Silicon Solar Cells:**

72 cells: JAM5-72-xxx/SI (xxx=180-210, in steps of 5)
72 cells: JAM5(L)-72-xxx/SI (xxx=180-220, in steps of 5)
72 cells: JAM5(R)-72-xxx (xxx=195-220, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 10A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Mono-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):**

72 cells: JAM72S03-xxx/PR/1000V (xxx=360-395, in steps of 5)
72 cells: JAM72S10-xxx/PR/1000V (xxx=380-410, in steps of 5)
72 cells: JAM72S10-xxx/BP/1000V (xxx=385-400, in steps of 5)
72 cells: JAM72S10-xxx/MR/1000V (xxx=390-430, in steps of 5)
72 cells: JAM72S10-xxx/MB/1000V (xxx=395-415, in steps of 5)
72 cells: JAM72S08-xxx/PR/1000V (xxx=360-395, in steps of 5)
72 cells: JAM72S17-xxx/PR/1000V (xxx=380-390, in steps of 5)
72 cells: JAM72S17-xxx/MR/1000V (xxx=390-430, in steps of 5)
72 cells: JAM72S17-xxx/GR/1000V (xxx=385-400, in steps of 5)
60 cells: JAM60S03-xxx/PR/1000V (xxx=300-330, in steps of 5)
60 cells: JAM60S10-xxx/PR/1000V (xxx=315-345, in steps of 5)
60 cells: JAM60S10-xxx/BP/1000V (xxx=320-330, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

60 cells: JAM60S10-xxx/MR/1000V (xxx=325-355, in steps of 5)
60 cells: JAM60S10-xxx/MB/1000V (xxx=330-345, in steps of 5)
60 cells: JAM60S08-xxx/PR/1000V (xxx=300-330, in steps of 5)
60 cells: JAM60S17-xxx/PR/1000V (xxx=315-325, in steps of 5)
60 cells: JAM60S17-xxx/MR/1000V (xxx=315-355, in steps of 5)
78 cells: JAM78S10-xxx/MR/1000V (xxx=435-465, in steps of 5)
66 cells: JAM66S10-xxx/MR/1000V (xxx=345-390, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Mono-crystalline Silicon half-cut Solar Cells (166mm to 168mm):**

72 cells: JAM72S20-xxx/MR/1000V (xxx=430-470, in steps of 5)
72 cells: JAM72S20-xxx/MB/1000V (xxx=450-465, in steps of 5)
60 cells: JAM60S20-xxx/MR/1000V (xxx=355-390, in steps of 5)
60 cells: JAM60S21-xxx/MR/1000V (xxx=355-390, in steps of 5)
60 cells: JAM60S20-xxx/MB/1000V (xxx=375-390, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 25A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with 182mm Mono-crystalline Silicon half-cut Solar Cells:**

60 cells: JAM60S30-xxx/MR/1000V (xxx=435-460, in steps of 5)
66 cells: JAM66S30-xxx/MR/1000V (xxx=470-505, in steps of 5)
72 cells: JAM72S30-xxx/MR/1000V (xxx=510-555, in steps of 5)
78 cells: JAM78S30-xxx/MR/1000V (xxx=580-605, in steps of 5)
54 cells: JAM54S30-xxx/MR/1000V (xxx=390-415, in steps of 5)
78 cells: JAM78S30-xxx/GR/1000V (xxx=575-600, in steps of 5)
72 cells: JAM72S30-xxx/GR/1000V (xxx=535-560, in steps of 5)
66 cells: JAM66S30-xxx/GR/1000V (xxx=500-510, in steps of 5)
60 cells: JAM60S30-xxx/GR/1000V (xxx=445-465, in steps of 5)
54 cells: JAM54S30-xxx/GR/1000V (xxx=400-420, in steps of 5)
72 cells: JAM72S31-xxx/MR/1000V (xxx=510-545, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

66 cells: JAM66S31-xxx/MR/1000V (xxx=470-500, in steps of 5)
60 cells: JAM60S31-xxx/MR/1000V (xxx=425-450, in steps of 5)
54 cells: JAM54S31-xxx/MR/1000V (xxx=385-405, in steps of 5)
78 cells: JAM78S31-xxx/GR/1000V (xxx=570-590, in steps of 5)
72 cells: JAM72S31-xxx/GR/1000V (xxx=525-545, in steps of 5)
66 cells: JAM66S31-xxx/GR/1000V (xxx=480-500, in steps of 5)
60 cells: JAM60S31-xxx/GR/1000V (xxx=435-450, in steps of 5)
54 cells: JAM54S31-xxx/GR/1000V (xxx=395-405, in steps of 5)
72 cells: JAM72S40-xxx/GR/1000V (xxx=545-570, in steps of 5)
66 cells: JAM66S40-xxx/GR/1000V (xxx=500-525, in steps of 5)
60 cells: JAM60S40-xxx/GR/1000V (xxx=455-475, in steps of 5)
54 cells: JAM54S40-xxx/GR/1000V (xxx=410-430, in steps of 5)
72 cells: JAM72S41-xxx/GR/1000V (xxx=540-570, in steps of 5)
66 cells: JAM66S41-xxx/GR/1000V (xxx=495-525, in steps of 5)
60 cells: JAM60S41-xxx/GR/1000V (xxx=450-475, in steps of 5)
54 cells: JAM54S41-xxx/GR/1000V (xxx=405-430, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 25A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with 210mm Mono-crystalline Silicon 1/3-cut Solar Cells:**

50 cells: JAM50S40-xxx/MR/1000V (xxx=490-500, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 25A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with 182mm Mono-crystalline Silicon 1/5-cut Solar Cells:**

76 cells: JAM76S11-xxx/PR(B)/1000V (xxx=395-415, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 25A
Application class: Class A
Electrical protection class: Class II



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Module types:

PV Modules with Poly-crystalline Silicon Solar Cells (156mm to 158.75mm):

72 cells: JAP6-72-xxx/3BB (xxx=250-330, in steps of 5)
72 cells: JAP6-72-xxx/4BB (xxx=305-330, in steps of 5)
72 cells: JAP6-72-xxx/RE (xxx=305-330, in steps of 5)
72 cells: JAP6-72-xxx/4BB/RE (xxx=305-330, in steps of 5)
72 cells: JAP6(K)-72-xxx/4BB (xxx=310-330, in steps of 5)
72 cells: JAP72S01-xxx/SC/1000V (xxx=310-345, in steps of 5)
72 cells: JAP72S01-xxx/PR/1000V (xxx=330-345, in steps of 5)
72 cells: JAP72S09-xxx/SC/1000V (xxx=320-345, in steps of 5)
72 cells: JAP72S01-xxx/MS/1000V (xxx=325-340, in steps of 5)
72 cells: JAP72S02-xxx/SC/1000V (xxx=310-345, in steps of 5)
72 cells: JAP72S02-xxx/PR/1000V (xxx=330-345, in steps of 5)
60 cells: JAP6-60-xxx/3BB (xxx=240-275, in steps of 5)
60 cells: JAP6(FA)-60-xxx/3BB (xxx=250-270, in steps of 5)
60 cells: JAP6-60-xxx/4BB (xxx=250-275, in steps of 5)
60 cells: JAP6-60-xxx/RE (xxx=255-280, in steps of 5)
60 cells: JAP6-60-xxx/4BB/RE (xxx=255-280, in steps of 5)
60 cells: JAP6(K)-60-xxx/4BB (xxx=255-275, in steps of 5)
60 cells: JAP60S01-xxx/SC/1000V (xxx=255-290, in steps of 5)
60 cells: JAP60S01-xxx/PR/1000V (xxx=275-285, in steps of 5)
60 cells: JAP60S09-xxx/SC/1000V (xxx=265-290, in steps of 5)
60 cells: JAP60S01-xxx/MS/1000V (xxx=270-280, in steps of 5)
60 cells: JAP60S02-xxx/SC/1000V (xxx=255-290, in steps of 5)
60 cells: JAP60S02-xxx/PR/1000V (xxx=275-285, in steps of 5)
54 cells: JAP54S01-xxx/SC (xxx=245-255, in steps of 5)
48 cells: JAP6(FA)-48-xxx/3BB (xxx=200-220, in steps of 5)
48 cells: JAP6-48-xxx/3BB (xxx=200-220, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Module types:

PV Modules with Poly-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):

72 cells: JAP72S03-xxx/SC/1000V (xxx=320-345, in steps of 5)
72 cells: JAP72S03-xxx/PR/1000V (xxx=335-355, in steps of 5)
72 cells: JAP72S10-xxx/SC/1000V (xxx=335-350, in steps of 5)
72 cells: JAP72S03-xxx/MS/1000V (xxx=320-345, in steps of 5)
72 cells: JAP72S08-xxx/SC/1000V (xxx=320-345, in steps of 5)
72 cells: JAP72S08-xxx/PR/1000V (xxx=335-355, in steps of 5)
60 cells: JAP60S03-xxx/SC/1000V (xxx=270-290, in steps of 5)
60 cells: JAP60S03-xxx/PR/1000V (xxx=280-295, in steps of 5)
60 cells: JAP60S10-xxx/SC/1000V (xxx=275-290, in steps of 5)
60 cells: JAP60S03-xxx/MS/1000V (xxx=270-285, in steps of 5)
60 cells: JAP60S08-xxx/SC/1000V (xxx=270-290, in steps of 5)
60 cells: JAP60S08-xxx/PR/1000V (xxx=280-295, in steps of 5)

Maximum system voltage:

1000V

Fuse rating:

20A

Application class:

Class A

Electrical protection class:

Class II

Module types:

PV Modules with Mono-crystalline Silicon Solar Cells (156mm to 158.75mm):

72 cells: JAM6(K)-72-xxx/PR/1500V (xxx=345-370, in steps of 5)
72 cells: JAM6(K)-72-xxx/4BB/1500V (xxx=320-345, in steps of 5)
72 cells: JAM72S01-xxx/PR (xxx=345-390, in steps of 5)
72 cells: JAM72S01-xxx/SC/1500V (xxx=320-365, in steps of 5)
72 cells: JAM72S01-xxx/MR/1500V (xxx=365-385, in steps of 5)
72 cells: JAM72S09-xxx/PR/1500V (xxx=370-405, in steps of 5)
72 cells: JAM72S09-xxx/BP/1500V (xxx=375-385, in steps of 5)
72 cells: JAM72S02-xxx/PR/1500V (xxx=345-390, in steps of 5)
72 cells: JAM72S02-xxx/SC/1500V (xxx=320-365, in steps of 5)
72 cells: JAM72S02-xxx/MR/1500V (xxx=365-385, in steps of 5)
72 cells: JAM72S12-xxx/PR/1500V (xxx=365-385, in steps of 5)
60 cells: JAM6(K)-60-xxx/PR/1500V (xxx=285-310, in steps of 5)
60 cells: JAM6(K)-60-xxx/4BB/1500V (xxx=265-285, in steps of 5)
60 cells: JAM60S01-xxx/PR/1500V (xxx=285-325, in steps of 5)
60 cells: JAM60S01-xxx/SC/1500V (xxx=265-305, in steps of 5)
60 cells: JAM60S01-xxx/MR/1500V (xxx=305-320, in steps of 5)
60 cells: JAM60S09-xxx/PR/1500V (xxx=310-335, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

60 cells: JAM60S09-xxx/BP/1500V (xxx=315-320, in steps of 5)
60 cells: JAM60S02-xxx/PR/1500V (xxx=285-325, in steps of 5)
60 cells: JAM60S02-xxx/SC/1500V (xxx=265-305, in steps of 5)
60 cells: JAM60S02-xxx/MR/1500V (xxx=305-320, in steps of 5)
60 cells: JAM60S12-xxx/PR/1500V (xxx=305-330, in steps of 5)

Maximum system voltage: 1500V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Mono-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):**

72 cells: JAM72S03-xxx/PR/1500V (xxx=360-395, in steps of 5)
72 cells: JAM72S10-xxx/PR/1500V (xxx=380-410, in steps of 5)
72 cells: JAM72S10-xxx/BP/1500V (xxx=385-400, in steps of 5)
72 cells: JAM72S10-xxx/MR/1500V (xxx=390-430, in steps of 5)
72 cells: JAM72S10-xxx/MB/1500V (xxx=395-415, in steps of 5)
72 cells: JAM72S08-xxx/PR/1500V (xxx=360-395, in steps of 5)
72 cells: JAM72S17-xxx/PR/1500V (xxx=380-390, in steps of 5)
72 cells: JAM72S17-xxx/MR/1500V (xxx=390-430, in steps of 5)
72 cells: JAM72S17-xxx/GR/1500V (xxx=385-400, in steps of 5)
60 cells: JAM60S03-xxx/PR/1500V (xxx=300-330, in steps of 5)
60 cells: JAM60S10-xxx/PR/1500V (xxx=315-345, in steps of 5)
60 cells: JAM60S10-xxx/BP/1500V (xxx=320-330, in steps of 5)
60 cells: JAM60S10-xxx/MR/1500V (xxx=325-355, in steps of 5)
60 cells: JAM60S10-xxx/MB/1500V (xxx=330-345, in steps of 5)
60 cells: JAM60S20-xxx/MR/1500V (xxx=355-390, in steps of 5)
60 cells: JAM60S21-xxx/MR/1500V (xxx=355-390, in steps of 5)
60 cells: JAM60S08-xxx/PR/1500V (xxx=300-330, in steps of 5)
60 cells: JAM60S17-xxx/PR/1500V (xxx=315-325, in steps of 5)
60 cells: JAM60S17-xxx/MR/1500V (xxx=315-355, in steps of 5)
78 cells: JAM78S10-xxx/MR/1500V (xxx=435-465, in steps of 5)
66 cells: JAM66S10-xxx/MR/1500V (xxx=345-390, in steps of 5)

Maximum system voltage: 1500V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Module types: **PV Modules with Mono-crystalline Silicon half-cut Solar Cells (166mm to 168mm):**
72 cells: JAM72S20-xxx/MR/1500V (xxx=430-470, in steps of 5)
72 cells: JAM72S20-xxx/MB/1500V (xxx=450-465, in steps of 5)
60 cells: JAM60S20-xxx/MB/1500V (xxx=375-390, in steps of 5)

Maximum system voltage: 1500V

Fuse rating: 25A

Application class: Class A

Electrical protection class: Class II

Module types: **PV Modules with 182mm Mono-crystalline Silicon half-cut Solar Cells:**
72 cells: JAM72S30-xxx/MR/1500V (xxx=510-555, in steps of 5)
66 cells: JAM66S30-xxx/MR/1500V (xxx=470-505, in steps of 5)
60 cells: JAM60S30-xxx/MR/1500V (xxx=435-460, in steps of 5)
54 cells: JAM54S30-xxx/MR/1500V (xxx=390-415, in steps of 5)
78 cells: JAM78S30-xxx/MR/1500V (xxx=580-605, in steps of 5)
78 cells: JAM78S30-xxx/GR/1500V (xxx=575-600, in steps of 5)
72 cells: JAM72S30-xxx/GR/1500V (xxx=535-560, in steps of 5)
66 cells: JAM66S30-xxx/GR/1500V (xxx=500-510, in steps of 5)
60 cells: JAM60S30-xxx/GR/1500V (xxx=445-465, in steps of 5)
54 cells: JAM54S30-xxx/GR/1500V (xxx=400-420, in steps of 5)
72 cells: JAM72S31-xxx/MR/1500V (xxx=510-545, in steps of 5)
66 cells: JAM66S31-xxx/MR/1500V (xxx=470-500, in steps of 5)
60 cells: JAM60S31-xxx/MR/1500V (xxx=425-450, in steps of 5)
54 cells: JAM54S31-xxx/MR/1500V (xxx=385-405, in steps of 5)
78 cells: JAM78S31-xxx/GR/1500V (xxx=575-590, in steps of 5)
72 cells: JAM72S31-xxx/GR/1500V (xxx=525-545, in steps of 5)
66 cells: JAM66S31-xxx/GR/1500V (xxx=480-500, in steps of 5)
60 cells: JAM60S31-xxx/GR/1500V (xxx=435-450, in steps of 5)
54 cells: JAM54S31-xxx/GR/1500V (xxx=395-405, in steps of 5)
72 cells: JAM72S40-xxx/GR/1500V (xxx=545-570, in steps of 5)
66 cells: JAM66S40-xxx/GR/1500V (xxx=500-525, in steps of 5)
60 cells: JAM60S40-xxx/GR/1500V (xxx=455-475, in steps of 5)
54 cells: JAM54S40-xxx/GR/1500V (xxx=410-430, in steps of 5)
72 cells: JAM72S41-xxx/GR/1500V (xxx=540-570, in steps of 5)
66 cells: JAM66S41-xxx/GR/1500V (xxx=495-525, in steps of 5)
60 cells: JAM60S41-xxx/GR/1500V (xxx=450-475, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

54 cells: JAM54S41-xxx/GR/1500V (xxx=405-430, in steps of 5)

Maximum system voltage: 1500V

Fuse rating: 25A

Application class: Class A

Electrical protection class: Class II

Module types: **PV Modules with 210mm Mono-crystalline Silicon 1/3-cut Solar Cells:**

50 cells: JAM50S40-xxx/MR/1500V (xxx=490-500, in steps of 5)

Maximum system voltage: 1500V

Fuse rating: 25A

Application class: Class A

Electrical protection class: Class II

Module types: **PV Modules with 182mm Mono-crystalline Silicon 1/5-cut Solar Cells:**

76 cells: JAM76S11-xxx/PR(B)/1500V (xxx=395-415, in steps of 5)

Maximum system voltage: 1500V

Fuse rating: 25A

Application class: Class A

Electrical protection class: Class II

Module types: **PV Modules with Poly-crystalline Silicon Solar Cells (156mm to 158.75mm):**

72 cells: JAP6(K)-72-xxx/4BB/1500V (xxx=310-330, in steps of 5)

72 cells: JAP72S01-xxx/SC/1500V (xxx=310-345, in steps of 5)

72 cells: JAP72S01-xxx/PR/1500V (xxx=330-345, in steps of 5)

72 cells: JAP72S09-xxx/SC/1500V (xxx=320-345, in steps of 5)

72 cells: JAP72S01-xxx/MS/1500V (xxx=325-340, in steps of 5)

72 cells: JAP72S02-xxx/SC/1500V (xxx=310-345, in steps of 5)

72 cells: JAP72S02-xxx/PR/1500V (xxx=330-345, in steps of 5)

60 cells: JAP6(K)-60-xxx/4BB/1500V (xxx=255-275, in steps of 5)

60 cells: JAP60S01-xxx/SC/1500V (xxx=255-290, in steps of 5)

60 cells: JAP60S01-xxx/PR/1500V (xxx=275-285, in steps of 5)

60 cells: JAP60S09-xxx/SC/1500V (xxx=265-290, in steps of 5)

60 cells: JAP60S01-xxx/MS/1500V (xxx=270-280, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

60 cells: JAP60S02-xxx/SC/1500V (xxx=255-290, in steps of 5)
60 cells: JAP60S02-xxx/PR/1500V (xxx=275-285, in steps of 5)

Maximum system voltage: 1500V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Poly-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):**

72 cells: JAP72S03-xxx/SC/1500V (xxx=320-345, in steps of 5)
72 cells: JAP72S03-xxx/PR/1500V (xxx=335-355, in steps of 5)
72 cells: JAP72S10-xxx/SC/1500V (xxx=335-350, in steps of 5)
72 cells: JAP72S03-xxx/MS/1500V (xxx=320-345, in steps of 5)
72 cells: JAP72S08-xxx/SC/1500V (xxx=320-345, in steps of 5)
72 cells: JAP72S08-xxx/PR/1500V (xxx=335-355, in steps of 5)
60 cells: JAP60S03-xxx/SC/1500V (xxx=270-290, in steps of 5)
60 cells: JAP60S03-xxx/PR/1500V (xxx=280-295, in steps of 5)
60 cells: JAP60S10-xxx/SC/1500V (xxx=275-290, in steps of 5)
60 cells: JAP60S03-xxx/MS/1500V (xxx=270-285, in steps of 5)
60 cells: JAP60S08-xxx/SC/1500V (xxx=270-290, in steps of 5)
60 cells: JAP60S08-xxx/PR/1500V (xxx=280-295, in steps of 5)

Maximum system voltage: 1500V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Mono-crystalline Silicon Solar Cells (156mm to 158.75mm):**

72 cells: JAM72S01-xxx/SC (xxx=320-365, in steps of 5)
72 cells: JAM72S02-xxx/SC (xxx=320-365, in steps of 5)
72 cells: JAM72S02-xxx/PR (xxx=345-390, in steps of 5)
72 cells: JAM72S01-xxx/MR (xxx=365-385, in steps of 5)
72 cells: JAM72S02-xxx/MR (xxx=365-385, in steps of 5)
72 cells: JAM72S09-xxx/PR (xxx=370-405, in steps of 5)
72 cells: JAM72S12-xxx/PR (xxx=365-385, in steps of 5)
72 cells: JAM72S09-xxx/BP (xxx=375-385, in steps of 5)
60 cells: JAM60S01-xxx/SC (xxx=265-305, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

60 cells: JAM60S02-xxx/SC (xxx=265-305, in steps of 5)
60 cells: JAM60S01-xxx/PR (xxx=285-325, in steps of 5)
60 cells: JAM60S02-xxx/PR (xxx=285-325, in steps of 5)
60 cells: JAM60S01-xxx/MR (xxx=305-320, in steps of 5)
60 cells: JAM60S02-xxx/MR (xxx=305-320, in steps of 5)
60 cells: JAM60S09-xxx/PR (xxx=310-335, in steps of 5)
60 cells: JAM60S12-xxx/PR (xxx=305-330, in steps of 5)
60 cells: JAM60S09-xxx/BP (xxx=315-320, in steps of 5)

Maximum system voltage: 1000V or 1500V

Fuse rating: 20A

Application class: Class A

Electrical protection class: Class II

Module types:

PV Modules with Mono-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):

72 cells: JAM72S03-xxx/PR (xxx=360-395, in steps of 5)
72 cells: JAM72S10-xxx/PR (xxx=380-410, in steps of 5)
72 cells: JAM72S17-xxx/PR (xxx=380-390, in steps of 5)
72 cells: JAM72S10-xxx/MR (xxx=390-430, in steps of 5)
72 cells: JAM72S17-xxx/MR (xxx=390-430, in steps of 5)
72 cells: JAM72S17-xxx/GR (xxx=385-400, in steps of 5)
72 cells: JAM72S10-xxx/BP (xxx=385-400, in steps of 5)
72 cells: JAM72S10-xxx/MB (xxx=395-415, in steps of 5)
72 cells: JAM72S08-xxx/PR (xxx=360-395, in steps of 5)
60 cells: JAM60S03-xxx/PR (xxx=300-330, in steps of 5)
60 cells: JAM60S08-xxx/PR (xxx=300-330, in steps of 5)
60 cells: JAM60S10-xxx/PR (xxx=315-345, in steps of 5)
60 cells: JAM60S10-xxx/MR (xxx=325-355, in steps of 5)
60 cells: JAM60S10-xxx/BP (xxx=320-330, in steps of 5)
60 cells: JAM60S10-xxx/MB (xxx=330-345, in steps of 5)
60 cells: JAM60S17-xxx/PR (xxx=315-325, in steps of 5)
60 cells: JAM60S17-xxx/MR (xxx=315-355, in steps of 5)
78 cells: JAM78S10-xxx/MR (xxx=435-465, in steps of 5)
78 cells: JAM78S10-xxx/MR-J (xxx=435-465, in steps of 5)
66 cells: JAM66S10-xxx/MR (xxx=345-390, in steps of 5)

Maximum system voltage: 1000V or 1500V

Fuse rating: 20A

Application class: Class A



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Electrical protection class: Class II

Module types: **PV Modules with Mono-crystalline Silicon half-cut Solar Cells (166mm to 168mm):**

72 cells: JAM72S20-xxx/MR (xxx=430-470, in steps of 5)

72 cells: JAM72S20-xxx/MB (xxx=450-465, in steps of 5)

60 cells: JAM60S20-xxx/MR (xxx=355-390, in steps of 5)

60 cells: JAM60S21-xxx/MR (xxx=355-390, in steps of 5)

60 cells: JAM60S20-xxx/MB (xxx=375-390, in steps of 5)

Maximum system voltage: 1000V or 1500V

Fuse rating: 20A

Application class: Class A

Electrical protection class: Class II

Module types: **PV Modules with 182mm Mono-crystalline Silicon half-cut Solar Cells:**

72 cells: JAM72S30-xxx/MR (xxx=510-555, in steps of 5)

66 cells: JAM66S30-xxx/MR (xxx=470-505, in steps of 5)

60 cells: JAM60S30-xxx/MR (xxx=435-460, in steps of 5)

54 cells: JAM54S30-xxx/MR (xxx=390-415, in steps of 5)

78 cells: JAM78S30-xxx/MR (xxx=580-605, in steps of 5)

78 cells: JAM78S30-xxx/GR (xxx=575-600, in steps of 5)

72 cells: JAM72S30-xxx/GR (xxx=535-560, in steps of 5)

66 cells: JAM66S30-xxx/GR (xxx=500-510, in steps of 5)

60 cells: JAM60S30-xxx/GR (xxx=445-465, in steps of 5)

54 cells: JAM54S30-xxx/GR (xxx=400-420, in steps of 5)

72 cells: JAM72S31-xxx/MR (xxx=510-545, in steps of 5)

66 cells: JAM66S31-xxx/MR (xxx=470-500, in steps of 5)

60 cells: JAM60S31-xxx/MR (xxx=425-450, in steps of 5)

54 cells: JAM54S31-xxx/MR (xxx=385-405, in steps of 5)

78 cells: JAM78S31-xxx/GR (xxx=575-590, in steps of 5)

72 cells: JAM72S31-xxx/GR (xxx=525-545, in steps of 5)

66 cells: JAM66S31-xxx/GR (xxx=480-500, in steps of 5)

60 cells: JAM60S31-xxx/GR (xxx=435-450, in steps of 5)

54 cells: JAM54S31-xxx/GR (xxx=395-405, in steps of 5)

72 cells: JAM72S40-xxx/GR (xxx=545-570, in steps of 5)

66 cells: JAM66S40-xxx/GR (xxx=500-525, in steps of 5)

60 cells: JAM60S40-xxx/GR (xxx=455-475, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

	54 cells: JAM54S40-xxx/GR (xxx=410-430, in steps of 5)
	72 cells: JAM72S41-xxx/GR (xxx=540-570, in steps of 5)
	66 cells: JAM66S41-xxx/GR (xxx=495-525, in steps of 5)
	60 cells: JAM60S41-xxx/GR (xxx=450-475, in steps of 5)
	54 cells: JAM54S41-xxx/GR (xxx=405-430, in steps of 5)
Maximum system voltage:	1000V or 1500V
Fuse rating:	25A
Application class:	Class A
Electrical protection class:	Class II
Module types:	PV Modules with 210mm Mono-crystalline Silicon 1/3-cut Solar Cells:
	50 cells: JAM50S40-xxx/MR (xxx=490-500, in steps of 5)
Maximum system voltage:	1000V or 1500V
Fuse rating:	25A
Application class:	Class A
Electrical protection class:	Class II
Module types:	PV Modules with 182mm Mono-crystalline Silicon 1/5-cut Solar Cells:
	68 cells: JAM68S11-xxx/PR (xxx=355-365, in steps of 5)
	68 cells: JAM68S11-xxx/PR(B) (xxx=345-365, in steps of 5)
	76 cells: JAM76S11-xxx/PR(B) (xxx=395-415, in steps of 5)
Maximum system voltage:	1000V or 1500V
Fuse rating:	25A
Application class:	Class A
Electrical protection class:	Class II
Module types:	PV Modules with Poly-crystalline Silicon Solar Cells (156mm to 158.75mm):
	72 cells: JAP72S01-xxx/SC (xxx=310-345, in steps of 5)
	72 cells: JAP72S02-xxx/SC (xxx=310-345, in steps of 5)
	72 cells: JAP72S01-xxx/PR (xxx=330-345, in steps of 5)
	72 cells: JAP72S02-xxx/PR (xxx=330-345, in steps of 5)
	72 cells: JAP72S09-xxx/SC (xxx=320-345, in steps of 5)
	72 cells: JAP72S01-xxx/MS (xxx=325-340, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

60 cells: JAP60S01-xxx/SC (xxx=255-290, in steps of 5)
60 cells: JAP60S02-xxx/SC (xxx=255-290, in steps of 5)
60 cells: JAP60S01-xxx/PR (xxx=275-285, in steps of 5)
60 cells: JAP60S02-xxx/PR (xxx=275-285, in steps of 5)
60 cells: JAP60S09-xxx/SC (xxx=265-290, in steps of 5)
60 cells: JAP60S01-xxx/MS (xxx=270-280, in steps of 5)
54 cells: JAP54S01-xxx/SC (xxx=245-255, in steps of 5)

Maximum system voltage: 1000V or 1500V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Poly-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):**

72 cells: JAP72S03-xxx/PR (xxx=335-355, in steps of 5)
72 cells: JAP72S03-xxx/SC (xxx=320-345, in steps of 5)
72 cells: JAP72S10-xxx/SC (xxx=335-350, in steps of 5)
72 cells: JAP72S03-xxx/MS (xxx=320-345, in steps of 5)
72 cells: JAP72S08-xxx/SC (xxx=320-345, in steps of 5)
72 cells: JAP72S08-xxx/PR (xxx=335-355, in steps of 5)
60 cells: JAP60S03-xxx/PR (xxx=280-295, in steps of 5)
60 cells: JAP60S03-xxx/SC (xxx=270-290, in steps of 5)
60 cells: JAP60S10-xxx/SC (xxx=275-290, in steps of 5)
60 cells: JAP60S03-xxx/MS (xxx=270-285, in steps of 5)
60 cells: JAP60S08-xxx/SC (xxx=270-290, in steps of 5)
60 cells: JAP60S08-xxx/PR (xxx=280-295, in steps of 5)

Maximum system voltage: 1000V or 1500V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Remark:

For detailed product information, please refer to CDF (Constructional Data Form) in Annex 1 of test report.



TÜV NORD CERT GmbH
Certification Body
Consumer Products



Product Service

Attestation of Conformity

No. N8A 072092 0296 Rev. 36**Holder of Attestation: Shanghai JA Solar Technology Co., Ltd.**

No. 118, Lane 3111
West Huancheng Road
Fengxian District
201401 Shanghai
PEOPLE'S REPUBLIC OF CHINA

**Product: Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono-Crystalline Silicon Photovoltaic Module**

This Attestation of Conformity is issued on a voluntary basis according to the Low Voltage Directive 2014/35/EU relating to electrical equipment designed for use within certain voltage limits. It confirms that the listed equipment complies with the principal protection requirements of the directive and is based on the technical specifications applicable at the time of issuance. It refers only to the particular sample submitted for conformity assessment. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061604115-69**Date,** 2023-01-19

(Zhulin Zhang)

Page 1 of 6

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



TUV®



Product Service

Attestation of Conformity

No. N8A 072092 0296 Rev. 36

Model(s):

1500 V DC Maximum System voltage, Fire Safety Class A or C Modules:
 JAM72D00-xxx/BP/1500V, JAM72D00-xxx/BP, xxx= 330 to 385 in steps of 5;
 JAM60D00-xxx/BP/1500V, JAM60D00-xxx/BP, xxx= 275 to 320 in steps of 5;
 JAM60D00-xxx/PR/1500V, JAM60D00-xxx/PR, xxx= 285 to 320 in steps of 5;
 JAM72D00-xxx/PR/1500V, JAM72D00-xxx/PR, xxx= 340 to 385 in steps of 5;
 JAM60D00-xxx/MB/1500V, JAM60D00-xxx/MB, xxx= 310 to 315 in steps of 5;
 JAM72D00-xxx/MB/1500V, JAM72D00-xxx/MB, xxx= 370 to 380 in steps of 5;
 JAM72D09-xxx/BP/1500V, JAM72D09-xxx/BP, xxx= 360 to 400 in steps of 5;
 JAM60D09-xxx/BP/1500V, JAM60D09-xxx/BP, xxx= 320 to 340 in steps of 5;
 JAM72D10-xxx/MB/1500V, JAM72D10-xxx/MB, xxx= 385 to 430 in steps of 5;
 JAM60D10-xxx/MB/1500V, JAM60D10-xxx/MB, xxx= 320 to 355 in steps of 5;
 JAM72D10-xxx/BP/1500V, JAM72D10-xxx/BP, xxx= 385 to 415 in steps of 5;
 JAM60D10-xxx/BP/1500V, JAM60D10-xxx/BP, xxx= 385 to 415 in steps of 5;
 JAM66D10-xxx/MB/1500V, JAM66D10-xxx/MB, xxx= 360 to 380 in steps of 5;
 JAM78D10-xxx/MB/1500V, JAM78D10-xxx/MB, xxx= 435 to 455 in steps of 5;
 JAM72D20-xxx/MB/1500V, JAM72D20-xxx/MB, xxx= 430 to 465 in steps of 5;
 JAM60D20-xxx/MB/1500V, JAM60D20-xxx/MB, xxx= 355 to 385 in steps of 5;
 JAM72D10-xxx/TB/1500V, JAM72D10-xxx/TB, xxx= 400 to 420 in steps of 5;
 JAM60D10-xxx/TB/1500V, JAM60D10-xxx/TB, xxx= 335 to 350 in steps of 5;
 JAM78D30-xxx/MB/1500V, JAM78D30-xxx/MB, xxx= 580 to 605 in steps of 5;
 JAM72D30-xxx/MB/1500V, JAM72D30-xxx/MB, xxx= 505 to 555 in steps of 5;
 JAM72D30-xxx/MB/F/1500V, JAM72D30-xxx/MB/F, xxx= 505 to 555 in steps of 5;
 JAM66D30-xxx/MB/1500V, JAM66D30-xxx/MB, xxx= 465 to 505 in steps of 5;
 JAM66D30-xxx/MB/F/1500V, JAM66D30-xxx/MB/F, xxx= 465 to 505 in steps of 5;
 JAM60D30-xxx/MB/1500V, JAM60D30-xxx/MB, xxx= 435 to 460 in steps of 5;
 JAM54D30-xxx/MB/1500V, JAM54D30-xxx/MB, xxx= 390 to 415 in steps of 5;
 JAM54D31-xxx/MB/1500V, JAM54D31-xxx/MB, xxx= 395 to 400 in steps of 5;
 JAM50D40-xxx/MB/1500V, JAM50D40-xxx/MB, xxx= 485 to 500 in steps of 5;
 JAM78D30-xxx/GB/1500V, JAM78D30-xxx/GB, xxx= 585 to 610 in steps of 5;
 JAM72D30-xxx/GB/1500V, JAM72D30-xxx/GB, xxx= 540 to 560 in steps of 5;
 JAM66D30-xxx/GB/1500V, JAM66D30-xxx/GB, xxx= 495 to 510 in steps of 5;
 JAM60D30-xxx/GB/1500V, JAM60D30-xxx/GB, xxx= 450 to 470 in steps of 5;
 JAM54D30-xxx/GB/1500V, JAM54D30-xxx/GB, xxx= 405 to 420 in steps of 5;
 JAM54D31-xxx/GB/1500V, JAM54D31-xxx/GB, xxx= 410 to 420 in steps of 5;
 JAM72D30-xxx/HB/1500V, JAM72D30-xxx/HB, xxx= 530 to 560 in steps of 5;
 JAM78D40-xxx/MB/1500V, JAM78D40-xxx/MB, xxx= 580 to 630 in steps of 5;
 JAM72D40-xxx/MB/1500V, JAM72D40-xxx/MB, xxx= 540 to 580 in steps of 5;
 JAM66D40-xxx/MB/1500V, JAM66D40-xxx/MB, xxx= 500 to 530 in steps of 5;
 JAM60D40-xxx/MB/1500V, JAM60D40-xxx/MB, xxx= 455 to 480 in steps of 5;
 JAM54D40-xxx/MB/1500V, JAM54D40-xxx/MB, xxx= 405 to 435 in steps of 5;
 JAM78D40-xxx/GB/1500V, JAM78D40-xxx/GB, xxx= 580 to 635 in steps of 5;
 JAM72D40-xxx/GB/1500V, JAM72D40-xxx/GB, xxx= 540 to 585 in steps of 5;
 JAM66D40-xxx/GB/1500V, JAM66D40-xxx/GB, xxx= 500 to 535 in steps of 5;
 JAM60D40-xxx/GB/1500V, JAM60D40-xxx/GB, xxx= 455 to 485 in steps of 5;
 JAM54D40-xxx/GB/1500V, JAM54D40-xxx/GB, xxx= 405 to 440 in steps of 5;
 JAM54D41-xxx/GB/1500V, JAM54D41-xxx/GB, xxx= 415 to 435 in steps of 5;
 JAM66D35-xxx/MB/1500V, JAM66D35-xxx/MB, xxx= 650 to 665 in steps of 5;
 JAM60D35-xxx/MB/1500V, JAM60D35-xxx/MB, xxx= 590 to 605 in steps of 5;
 JAM72D30-xxx/TB/1500V, JAM72D30-xxx/TB, xxx= 540 to 580 in steps of 5;

1000 V DC Maximum System voltage, Fire Safety Class C Modules:

JAM6(K)-72-xxx/PR, xxx= 345 to 370 in steps of 5;
 JAM6(K)-60-xxx/PR, xxx= 285 to 310 in steps of 5;
 JAM6(K)-72-xxx/4BB, xxx= 320 to 345 in steps of 5;
 JAM6(K)-60-xxx/4BB, xxx= 265 to 285 in steps of 5;
 JAM72S01-xxx/SC/1000V, xxx= 320 to 365 in steps of 5;
 JAM60S01-xxx/SC/1000V, xxx= 265 to 305 in steps of 5;
 JAM72S01-xxx/PR/1000V, xxx= 345 to 390 in steps of 5;
 JAM60S01-xxx/PR/1000V, xxx= 285 to 325 in steps of 5;
 JAM72S01-xxx/MR/1000V, xxx= 365 to 385 in steps of 5;
 JAM60S01-xxx/MR/1000V, xxx= 305 to 320 in steps of 5;

Page 2 of 6

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



TUV®



Product Service

Attestation of Conformity

No. N8A 072092 0296 Rev. 36

JAM72S03-xxx/PR/1000V, xxx= 360 to 395 in steps of 5;
 JAM60S03-xxx/PR/1000V, xxx= 300 to 330 in steps of 5;
 JAM72S09-xxx/PR/1000V, xxx= 370 to 405 in steps of 5;
 JAM60S09-xxx/PR/1000V, xxx= 310 to 335 in steps of 5;
 JAM72S10-xxx/PR/1000V, xxx= 380 to 410 in steps of 5;
 JAM60S10-xxx/PR/1000V, xxx= 315 to 345 in steps of 5;
 JAM72S10-xxx/MR/1000V, xxx= 390 to 430 in steps of 5;
 JAM60S10-xxx/MR/1000V, xxx= 325 to 355 in steps of 5;
 JAM60S10-xxx/MR-L/1000V, xxx= 325 to 355 in steps of 5;
 JAM78S10-xxx/MR/1000V, xxx= 435 to 465 in steps of 5;
 JAM66S10-xxx/MR/1000V, xxx= 345 to 390 in steps of 5;
 JAM72S09-xxx/BP/1000V, xxx= 375 to 385 in steps of 5;
 JAM60S09-xxx/BP/1000V, xxx= 315 to 320 in steps of 5;
 JAM72S10-xxx/BP/1000V, xxx= 385 to 400 in steps of 5;
 JAM60S10-xxx/BP/1000V, xxx= 320 to 330 in steps of 5;
 JAM72S02-xxx/PR/1000V, xxx= 345 to 390 in steps of 5;
 JAM60S02-xxx/PR/1000V, xxx= 285 to 325 in steps of 5;
 JAM72S02-xxx/SC/1000V, xxx= 320 to 365 in steps of 5;
 JAM60S02-xxx/SC/1000V, xxx= 265 to 305 in steps of 5;
 JAM72S02-xxx/MR/1000V, xxx= 365 to 385 in steps of 5;
 JAM60S02-xxx/MR/1000V, xxx= 305 to 320 in steps of 5;
 JAM72S08-xxx/PR/1000V, xxx= 360 to 395 in steps of 5;
 JAM60S08-xxx/PR/1000V, xxx= 300 to 330 in steps of 5;
 JAM72S12-xxx/PR/1000V, xxx= 365 to 385 in steps of 5;
 JAM60S12-xxx/PR/1000V, xxx= 305 to 330 in steps of 5;
 JAM72S17-xxx/PR/1000V, xxx= 380 to 390 in steps of 5;
 JAM60S17-xxx/PR/1000V, xxx= 315 to 325 in steps of 5;
 JAM72S17-xxx/MR/1000V, xxx= 390 to 430 in steps of 5;
 JAM60S17-xxx/MR/1000V, xxx= 315 to 355 in steps of 5;
 JAM72S10-xxx/MB/1000V, xxx= 395 to 415 in steps of 5;
 JAM60S10-xxx/MB/1000V, xxx= 330 to 345 in steps of 5;
 JAM72S20-xxx/MR/1000V, xxx= 430 to 470 in steps of 5;
 JAM60S20-xxx/MR/1000V, xxx= 355 to 390 in steps of 5;
 JAM78S30-xxx/MR/1000V, xxx= 580 to 605 in steps of 5;
 JAM72S30-xxx/MR/1000V, xxx= 510 to 555 in steps of 5;
 JAM66S30-xxx/MR/1000V, xxx= 470 to 505 in steps of 5;
 JAM60S30-xxx/MR/1000V, xxx= 435 to 460 in steps of 5;
 JAM54S30-xxx/MR/1000V, xxx= 390 to 425 in steps of 5;
 JAM60S21-xxx/MR/1000V, xxx= 355 to 390 in steps of 5;
 JAM50S40-xxx/MR/1000V, xxx= 490 to 500 in steps of 5;
 JAM72S20-xxx/MB/1000V, xxx= 450 to 465 in steps of 5;
 JAM60S20-xxx/MB/1000V, xxx= 375 to 390 in steps of 5;
 JAM72S31-xxx/MR/1000V, xxx= 510 to 545 in steps of 5;
 JAM66S31-xxx/MR/1000V, xxx= 470 to 500 in steps of 5;
 JAM60S31-xxx/MR/1000V, xxx= 425 to 450 in steps of 5;
 JAM54S31-xxx/MR/1000V, xxx= 385 to 405 in steps of 5;
 JAM76S11-xxx/PR(B)/1000V, xxx= 395 to 415 in steps of 5;
 JAM78S30-xxx/GR/1000V, xxx= 575 to 610 in steps of 5;
 JAM72S30-xxx/GR/1000V, xxx= 535 to 560 in steps of 5;
 JAM66S30-xxx/GR/1000V, xxx= 500 to 510 in steps of 5;
 JAM60S30-xxx/GR/1000V, xxx= 445 to 470 in steps of 5;
 JAM54S30-xxx/GR/1000V, xxx= 400 to 420 in steps of 5;
 JAM78S31-xxx/GR/1000V, xxx= 570 to 590 in steps of 5;
 JAM72S31-xxx/GR/1000V, xxx= 525 to 545 in steps of 5;
 JAM66S31-xxx/GR/1000V, xxx= 480 to 500 in steps of 5;
 JAM60S31-xxx/GR/1000V, xxx= 430 to 450 in steps of 5;
 JAM54S31-xxx/GR/1000V, xxx= 395 to 415 in steps of 5;
 JAM72S17-xxx/GR/1000V, xxx= 385 to 400 in steps of 5;
 JAM72S40-xxx/GR/1000V, xxx= 540 to 575 in steps of 5;
 JAM66S40-xxx/GR/1000V, xxx= 495 to 525 in steps of 5;
 JAM60S40-xxx/GR/1000V, xxx= 450 to 480 in steps of 5;
 JAM54S40-xxx/GR/1000V, xxx= 405 to 430 in steps of 5;

Page 3 of 6

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



TUV®



Product Service

Attestation of Conformity

No. N8A 072092 0296 Rev. 36

JAM72S41-xxx/GR/1000V, xxx= 540 to 570 in steps of 5;
 JAM66S41-xxx/GR/1000V, xxx= 495 to 525 in steps of 5;
 JAM60S41-xxx/GR/1000V, xxx= 450 to 475 in steps of 5;
 JAM54S41-xxx/GR/1000V, xxx= 405 to 430 in steps of 5;
 JAM66S35-xxx/MR/1000V, xxx= 650 to 670 in steps of 5;
 JAM60S35-xxx/MR/1000V, xxx= 590 to 610 in steps of 5;

1000 V DC or 1500 V DC Maximum System voltage,
 Fire Safety Class C Modules:

JAM72S01-xxx/SC, xxx= 320 to 365 in steps of 5;
 JAM60S01-xxx/SC, xxx= 265 to 305 in steps of 5;
 JAM60S01-xxx/PR, xxx= 285 to 325 in steps of 5;
 JAM72S01-xxx/MR, xxx= 365 to 385 in steps of 5;
 JAM60S01-xxx/MR, xxx= 305 to 320 in steps of 5;
 JAM72S03-xxx/PR, xxx= 360 to 395 in steps of 5;
 JAM60S03-xxx/PR, xxx= 300 to 330 in steps of 5;
 JAM72S09-xxx/PR, xxx= 370 to 405 in steps of 5;
 JAM60S09-xxx/PR, xxx= 310 to 335 in steps of 5;
 JAM72S10-xxx/PR, xxx= 380 to 410 in steps of 5;
 JAM60S10-xxx/PR, xxx= 315 to 345 in steps of 5;
 JAM72S10-xxx/MR, xxx= 390 to 430 in steps of 5;
 JAM60S10-xxx/MR, xxx= 325 to 355 in steps of 5;
 JAM60S10-xxx/MR-L, xxx= 325 to 355 in steps of 5;
 JAM78S10-xxx/MR, xxx= 435 to 465 in steps of 5;
 JAM66S10-xxx/MR, xxx= 345 to 390 in steps of 5;
 JAM72S09-xxx/BP, xxx= 375 to 385 in steps of 5;
 JAM60S09-xxx/BP, xxx= 315 to 320 in steps of 5;
 JAM72S10-xxx/BP, xxx= 385 to 400 in steps of 5;
 JAM60S10-xxx/BP, xxx= 320 to 330 in steps of 5;
 JAM72S02-xxx/PR, xxx= 345 to 390 in steps of 5;
 JAM60S02-xxx/PR, xxx= 285 to 325 in steps of 5;
 JAM72S02-xxx/SC, xxx= 320 to 365 in steps of 5;
 JAM60S02-xxx/SC, xxx= 265 to 305 in steps of 5;
 JAM72S02-xxx/MR, xxx= 365 to 385 in steps of 5;
 JAM60S02-xxx/MR, xxx= 305 to 320 in steps of 5;
 JAM72S08-xxx/PR, xxx= 360 to 395 in steps of 5;
 JAM60S08-xxx/PR, xxx= 300 to 330 in steps of 5;
 JAM72S12-xxx/PR, xxx= 365 to 385 in steps of 5;
 JAM60S12-xxx/PR, xxx= 305 to 330 in steps of 5;
 JAM72S17-xxx/PR, xxx= 380 to 390 in steps of 5;
 JAM60S17-xxx/PR, xxx= 315 to 325 in steps of 5;
 JAM72S17-xxx/MR, xxx= 390 to 430 in steps of 5;
 JAM60S17-xxx/MR, xxx= 315 to 355 in steps of 5;
 JAM72S10-xxx/MB, xxx= 395 to 415 in steps of 5;
 JAM60S10-xxx/MB, xxx= 330 to 345 in steps of 5;
 JAM72S20-xxx/MR, xxx= 430 to 470 in steps of 5;
 JAM60S20-xxx/MR, xxx= 355 to 390 in steps of 5;
 JAM78S10-xxx/MR-J, xxx= 435 to 465 in steps of 5;
 JAM78S30-xxx/MR, xxx= 580 to 605 in steps of 5;
 JAM72S30-xxx/MR, xxx= 510 to 555 in steps of 5;
 JAM66S30-xxx/MR, xxx= 470 to 505 in steps of 5;
 JAM60S30-xxx/MR, xxx= 435 to 460 in steps of 5;
 JAM54S30-xxx/MR, xxx= 390 to 425 in steps of 5;
 JAM60S21-xxx/MR, xxx= 355 to 390 in steps of 5;
 JAM50S40-xxx/MR, xxx= 490 to 500 in steps of 5;
 JAM72S20-xxx/MB, xxx= 450 to 465 in steps of 5;
 JAM60S20-xxx/MB, xxx= 375 to 390 in steps of 5;
 JAM68S11-xxx/PR, xxx= 355 to 365 in steps of 5;
 JAM68S11-xxx/PR(B), xxx= 345 to 365 in steps of 5;
 JAM72S31-xxx/MR, xxx= 510 to 545 in steps of 5;
 JAM66S31-xxx/MR, xxx= 470 to 500 in steps of 5;
 JAM60S31-xxx/MR, xxx= 425 to 450 in steps of 5;
 JAM54S31-xxx/MR, xxx= 385 to 405 in steps of 5;

Page 4 of 6

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



TUV®



Product Service

Attestation of Conformity

No. N8A 072092 0296 Rev. 36

JAM76S11-xxx/PR(B), xxx= 395 to 415 in steps of 5;
 JAM78S30-xxx/GR, xxx= 575 to 610 in steps of 5;
 JAM72S30-xxx/GR, xxx= 535 to 560 in steps of 5;
 JAM66S30-xxx/GR, xxx= 500 to 510 in steps of 5;
 JAM60S30-xxx/GR, xxx= 445 to 470 in steps of 5;
 JAM54S30-xxx/GR, xxx= 400 to 420 in steps of 5;
 JAM78S31-xxx/GR, xxx= 570 to 590 in steps of 5;
 JAM72S31-xxx/GR, xxx= 525 to 545 in steps of 5;
 JAM66S31-xxx/GR, xxx= 480 to 500 in steps of 5;
 JAM60S31-xxx/GR, xxx= 435 to 450 in steps of 5;
 JAM54S31-xxx/GR, xxx= 395 to 415 in steps of 5;
 JAM72S17-xxx/GR, xxx= 385 to 400 in steps of 5;
 JAM72S40-xxx/GR, xxx= 540 to 575 in steps of 5;
 JAM66S40-xxx/GR, xxx= 495 to 525 in steps of 5;
 JAM60S40-xxx/GR, xxx= 450 to 480 in steps of 5;
 JAM54S40-xxx/GR, xxx= 405 to 430 in steps of 5;
 JAM72S41-xxx/GR, xxx= 540 to 570 in steps of 5;
 JAM66S41-xxx/GR, xxx= 495 to 525 in steps of 5;
 JAM60S41-xxx/GR, xxx= 450 to 475 in steps of 5;
 JAM54S41-xxx/GR, xxx= 405 to 430 in steps of 5;
 JAM66S35-xxx/MR, xxx= 650 to 670 in steps of 5;
 JAM60S35-xxx/MR, xxx= 590 to 610 in steps of 5;

1500 V DC Maximum System voltage, Fire Safety Class C Modules:

JAM6(K)-72-xxx/PR/1500V, xxx= 345 to 370 in steps of 5;
 JAM6(K)-60-xxx/PR/1500V, xxx= 285 to 310 in steps of 5;
 JAM6(K)-72-xxx/4BB/1500V, xxx= 320 to 345 in steps of 5;
 JAM6(K)-60-xxx/4BB/1500V, xxx= 265 to 285 in steps of 5;
 JAM72S01-xxx/SC/1500V, xxx= 320 to 365 in steps of 5;
 JAM60S01-xxx/SC/1500V, xxx= 265 to 305 in steps of 5;
 JAM72S01-xxx/PR, xxx= 345 to 390 in steps of 5;
 JAM60S01-xxx/PR/1500V, xxx= 285 to 325 in steps of 5;
 JAM72S01-xxx/MR/1500V, xxx= 365 to 385 in steps of 5;
 JAM60S01-xxx/MR/1500V, xxx= 305 to 320 in steps of 5;
 JAM72S03-xxx/PR/1500V, xxx= 360 to 395 in steps of 5;
 JAM60S03-xxx/PR/1500V, xxx= 300 to 330 in steps of 5;
 JAM72S09-xxx/PR/1500V, xxx= 370 to 405 in steps of 5;
 JAM60S09-xxx/PR/1500V, xxx= 310 to 335 in steps of 5;
 JAM72S10-xxx/PR/1500V, xxx= 380 to 410 in steps of 5;
 JAM60S10-xxx/PR/1500V, xxx= 315 to 345 in steps of 5;
 JAM72S10-xxx/MR/1500V, xxx= 390 to 430 in steps of 5;
 JAM60S10-xxx/MR/1500V, xxx= 325 to 355 in steps of 5;
 JAM60S10-xxx/MR-L/1500V, xxx= 325 to 355 in steps of 5;
 JAM78S10-xxx/MR/1500V, xxx= 435 to 465 in steps of 5;
 JAM66S10-xxx/MR/1500V, xxx= 345 to 390 in steps of 5;
 JAM72S09-xxx/BP/1500V, xxx= 375 to 385 in steps of 5;
 JAM60S09-xxx/BP/1500V, xxx= 315 to 320 in steps of 5;
 JAM72S10-xxx/BP/1500V, xxx= 385 to 400 in steps of 5;
 JAM60S10-xxx/BP/1500V, xxx= 320 to 330 in steps of 5;
 JAM72S02-xxx/PR/1500V, xxx= 345 to 390 in steps of 5;
 JAM60S02-xxx/PR/1500V, xxx= 285 to 325 in steps of 5;
 JAM72S02-xxx/SC/1500V, xxx= 320 to 365 in steps of 5;
 JAM60S02-xxx/SC/1500V, xxx= 265 to 305 in steps of 5;
 JAM72S02-xxx/MR/1500V, xxx= 365 to 385 in steps of 5;
 JAM60S02-xxx/MR/1500V, xxx= 305 to 320 in steps of 5;
 JAM72S08-xxx/PR/1500V, xxx= 360 to 395 in steps of 5;
 JAM60S08-xxx/PR/1500V, xxx= 300 to 330 in steps of 5;
 JAM72S12-xxx/PR/1500V, xxx= 365 to 385 in steps of 5;
 JAM60S12-xxx/PR/1500V, xxx= 305 to 330 in steps of 5;
 JAM72S17-xxx/PR/1500V, xxx= 380 to 390 in steps of 5;
 JAM60S17-xxx/PR/1500V, xxx= 315 to 325 in steps of 5;
 JAM72S17-xxx/MR/1500V, xxx= 390 to 430 in steps of 5;
 JAM60S17-xxx/MR/1500V, xxx= 315 to 355 in steps of 5;

Page 5 of 6

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



TUV®



Product Service

Attestation of Conformity

No. N8A 072092 0296 Rev. 36

JAM72S10-xxx/MB/1500V, xxx= 395 to 415 in steps of 5;
 JAM60S10-xxx/MB/1500V, xxx= 330 to 345 in steps of 5;
 JAM72S20-xxx/MR/1500V, xxx= 430 to 470 in steps of 5;
 JAM60S20-xxx/MR/1500V, xxx= 355 to 390 in steps of 5;
 JAM78S30-xxx/MR/1500V, xxx= 580 to 605 in steps of 5;
 JAM72S30-xxx/MR/1500V, xxx=510 to 555 in steps of 5;
 JAM66S30-xxx/MR/1500V, xxx=470 to 505 in steps of 5;
 JAM60S30-xxx/MR/1500V, xxx=435 to 460 in steps of 5;
 JAM54S30-xxx/MR/1500V, xxx= 390 to 425 in steps of 5;
 JAM60S21-xxx/MR/1500V, xxx= 355 to 390 in steps of 5;
 JAM50S40-xxx/MR/1500V, xxx= 490 to 500 in steps of 5;
 JAM72S20-xxx/MB/1500V, xxx= 450 to 465 in steps of 5;
 JAM60S20-xxx/MB/1500V, xxx= 375 to 390 in steps of 5;
 JAM72S31-xxx/MR/1500V, xxx= 510 to 545 in steps of 5;
 JAM66S31-xxx/MR/1500V, xxx= 470 to 500 in steps of 5;
 JAM60S31-xxx/MR/1500V, xxx= 425 to 450 in steps of 5;
 JAM54S31-xxx/MR/1500V, xxx= 385 to 405 in steps of 5;
 JAM76S11-xxx/PR(B)/1500V, xxx= 395 to 415 in steps of 5;
 JAM78S30-xxx/GR/1500V, xxx= 575 to 610 in steps of 5;
 JAM72S30-xxx/GR/1500V, xxx= 535 to 560 in steps of 5;
 JAM66S30-xxx/GR/1500V, xxx= 500 to 510 in steps of 5;
 JAM60S30-xxx/GR/1500V, xxx= 445 to 470 in steps of 5;
 JAM54S30-xxx/GR/1500V, xxx= 400 to 420 in steps of 5;
 JAM78S31-xxx/GR/1500V, xxx= 570 to 590 in steps of 5;
 JAM72S31-xxx/GR/1500V, xxx= 525 to 545 in steps of 5;
 JAM66S31-xxx/GR/1500V, xxx= 480 to 500 in steps of 5;
 JAM60S31-xxx/GR/1500V, xxx= 435 to 450 in steps of 5;
 JAM54S31-xxx/GR/1500V, xxx= 395 to 415 in steps of 5;
 JAM72S17-xxx/GR/1500V, xxx= 385 to 400 in steps of 5;
 JAM72S40-xxx/GR/1500V, xxx= 540 to 575 in steps of 5;
 JAM66S40-xxx/GR/1500V, xxx= 495 to 525 in steps of 5;
 JAM60S40-xxx/GR/1500V, xxx= 450 to 480 in steps of 5;
 JAM54S40-xxx/GR/1500V, xxx= 405 to 430 in steps of 5;
 JAM72S41-xxx/GR/1500V, xxx= 540 to 570 in steps of 5;
 JAM66S41-xxx/GR/1500V, xxx= 495 to 525 in steps of 5;
 JAM60S41-xxx/GR/1500V, xxx= 450 to 475 in steps of 5;
 JAM54S41-xxx/GR/1500V, xxx= 405 to 430 in steps of 5;
 JAM66S35-xxx/MR/1500V, xxx= 650 to 670 in steps of 5;
 JAM60S35-xxx/MR/1500V, xxx= 590 to 610 in steps of 5;
 xxx is standing for rated output power at STC

Parameters:

Construction:	Framed or Frameless, with Junction box, Cable and Connectors.
Test Laboratory:	Yangzhou Opto-Electrical Products Testing Institute No. 10 West Kaifa Road, Yangzhou 225009 Jiangsu, P. R. China
Safety Class:	Class II
Maximum System Voltage:	1500 V DC or 1000 V DC
Fire Safety Class:	Class C or Class A according to UL790.

Tested according to:

EN IEC 61730-1:2018
 EN IEC 61730-1:2018/AC:2018-06
 EN IEC 61730-2:2018
 EN IEC 61730-2:2018/AC:2018-06

Page 6 of 6

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



TUV®




Product Service

CERTIFICATE

No. Z2 072092 0300 Rev. 20

Holder of Certificate: Shanghai JA Solar Technology Co., Ltd.
No. 118, Lane 3111
West Huancheng Road
Fengxian District
201401 Shanghai
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

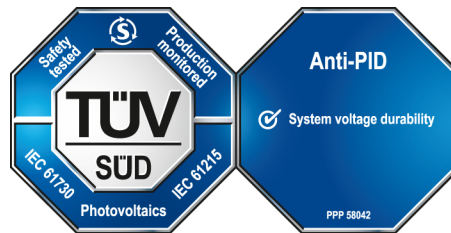

Product: Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061900211-20

Valid until: 2028-01-15

Date, 2023-01-17

(Zhulin Zhang)

CERTIFICATE

No. Z2 072092 0300 Rev. 20

Model(s):

Maximum System Voltage: 1000 V DC

JAM6(K)-72-xxx/PR, xxx=345 to 370 in steps of 5
 JAM6(K)-60-xxx/PR, xxx=285 to 310 in steps of 5
 JAM6(K)-72-xxx/4BB, xxx=320 to 345 in steps of 5
 JAM6(K)-60-xxx/4BB, xxx=265 to 285 in steps of 5
 JAM72S01-xxx/SC/1000V, xxx=320 to 365 in steps of 5
 JAM60S01-xxx/SC/1000V, xxx=265 to 305 in steps of 5
 JAM72S01-xxx/PR/1000V, xxx=345 to 390 in steps of 5
 JAM60S01-xxx/PR/1000V, xxx=285 to 325 in steps of 5
 JAM72S03-xxx/PR/1000V, xxx=360 to 395 in steps of 5
 JAM60S03-xxx/PR/1000V, xxx=300 to 330 in steps of 5
 JAM72S09-xxx/PR/1000V, xxx=370 to 405 in steps of 5
 JAM60S09-xxx/PR/1000V, xxx=310 to 335 in steps of 5
 JAM72S09-xxx/BP/1000V, xxx=375 to 385 in steps of 5
 JAM60S09-xxx/BP/1000V, xxx=315 to 320 in steps of 5
 JAM72S10-xxx/PR/1000V, xxx=380 to 410 in steps of 5
 JAM60S10-xxx/PR/1000V, xxx=315 to 345 in steps of 5
 JAM72S10-xxx/BP/1000V, xxx=385 to 400 in steps of 5
 JAM60S10-xxx/BP/1000V, xxx=320 to 330 in steps of 5
 JAM72S10-xxx/MR/1000V, xxx=390 to 430 in steps of 5
 JAM60S10-xxx/MR/1000V, xxx=325 to 355 in steps of 5
 JAM78S10-xxx/MR/1000V, xxx=435 to 465 in steps of 5
 JAM66S10-xxx/MR/1000V, xxx=345 to 390 in steps of 5
 JAM72S17-xxx/MR/1000V, xxx=390 to 430 in steps of 5
 JAM60S17-xxx/MR/1000V, xxx=315 to 355 in steps of 5
 JAM72S10-xxx/MB/1000V, xxx=395 to 415 in steps of 5
 JAM60S10-xxx/MB/1000V, xxx=330 to 345 in steps of 5
 JAM72S20-xxx/MR/1000V, xxx=430 to 470 in steps of 5
 JAM60S20-xxx/MR/1000V, xxx=355 to 390 in steps of 5
 JAM72S30-xxx/MR/1000V, xxx=510 to 555 in steps of 5
 JAM66S30-xxx/MR/1000V, xxx=470 to 505 in steps of 5
 JAM60S30-xxx/MR/1000V, xxx=435 to 460 in steps of 5
 JAM60S21-xxx/MR/1000V, xxx=355 to 390 in steps of 5
 JAM54S30-xxx/MR/1000V, xxx=390 to 425 in steps of 5
 JAM72S20-xxx/MB/1000V, xxx=450 to 465 in steps of 5
 JAM60S20-xxx/MB/1000V, xxx=375 to 390 in steps of 5
 JAM76S11-xxx/PR(B)/1000V, xxx=395 to 415 in steps of 5
 JAM78S30-xxx/GR/1000V, xxx=575 to 600 in steps of 5
 JAM72S30-xxx/GR/1000V, xxx=535 to 560 in steps of 5
 JAM66S30-xxx/GR/1000V, xxx=500 to 510 in steps of 5
 JAM60S30-xxx/GR/1000V, xxx=445 to 465 in steps of 5
 JAM54S30-xxx/GR/1000V, xxx=400 to 420 in steps of 5
 JAM78S31-xxx/GR/1000V, xxx=570 to 590 in steps of 5
 JAM72S31-xxx/GR/1000V, xxx=525 to 545 in steps of 5
 JAM66S31-xxx/GR/1000V, xxx=480 to 500 in steps of 5
 JAM60S31-xxx/GR/1000V, xxx=435 to 450 in steps of 5
 JAM54S31-xxx/GR/1000V, xxx=395 to 405 in steps of 5
 JAM72S31-xxx/MR/1000V, xxx=510 to 545 in steps of 5
 JAM66S31-xxx/MR/1000V, xxx=470 to 500 in steps of 5
 JAM60S31-xxx/MR/1000V, xxx=425 to 450 in steps of 5
 JAM54S31-xxx/MR/1000V, xxx=385 to 405 in steps of 5
 JAM78S30-xxx/MR/1000V, xxx=580 to 605 in steps of 5
 JAM72S17-xxx/GR/1000V, xxx=385 to 400 in steps of 5
 JAM72S40-xxx/GR/1000V, xxx=540 to 575 in steps of 5
 JAM66S40-xxx/GR/1000V, xxx=495 to 525 in steps of 5
 JAM60S40-xxx/GR/1000V, xxx=450 to 480 in steps of 5
 JAM54S40-xxx/GR/1000V, xxx=405 to 430 in steps of 5
 JAM72S41-xxx/GR/1000V, xxx=540 to 570 in steps of 5
 JAM66S41-xxx/GR/1000V, xxx=495 to 525 in steps of 5
 JAM60S41-xxx/GR/1000V, xxx=450 to 475 in steps of 5
 JAM54S41-xxx/GR/1000V, xxx=405 to 430 in steps of 5
 JAM66S35-xxx/MR/1000V, xxx= 650 to 670 in steps of 5
 JAM60S35-xxx/MR/1000V, xxx= 590 to 610 in steps of 5
 Maximum System Voltage: 1500 V DC
 JAM72D00-xxx/BP/1500V, xxx=330 to 385 in steps of 5
 JAM72D00-xxx/BP, xxx=330 to 385 in steps of 5
 JAM60D00-xxx/BP/1500V, xxx=275 to 320 in steps of 5
 JAM60D00-xxx/BP, xxx=275 to 320 in steps of 5
 JAM72D00-xxx/PR/1500V, xxx=340 to 385 in steps of 5
 JAM72D00-xxx/PR, xxx=340 to 385 in steps of 5

CERTIFICATE

No. Z2 072092 0300 Rev. 20

JAM60D00-xxx/PR/1500V, xxx=285 to 320 in steps of 5
 JAM60D00-xxx/PR, xxx=285 to 320 in steps of 5
 JAM72D09-xxx/BP/1500V, xxx=360 to 400 in steps of 5
 JAM72D09-xxx/BP, xxx=360 to 400 in steps of 5
 JAM60D09-xxx/BP/1500V, xxx=300 to 340 in steps of 5
 JAM60D09-xxx/BP, xxx=300 to 340 in steps of 5
 JAM72D10-xxx/MB/1500V, xxx=385 to 430 in steps of 5
 JAM72D10-xxx/MB, xxx=385 to 430 in steps of 5
 JAM60D10-xxx/MB/1500V, xxx=320 to 355 in steps of 5
 JAM60D10-xxx/MB, xxx=320 to 355 in steps of 5
 JAM72D10-xxx/BP/1500V, xxx=385 to 415 in steps of 5
 JAM72D10-xxx/BP, xxx=385 to 415 in steps of 5
 JAM60D10-xxx/BP/1500V, xxx=320 to 345 in steps of 5
 JAM60D10-xxx/BP, xxx=320 to 345 in steps of 5
 JAM66D10-xxx/MB, xxx=360 to 380 in steps of 5
 JAM66D10-xxx/MB/1500V, xxx=360 to 380 in steps of 5
 JAM78D10-xxx/MB, xxx=435 to 455 in steps of 5
 JAM78D10-xxx/MB/1500V, xxx=435 to 455 in steps of 5
 JAM72D20-xxx/MB, xxx=430 to 465 in steps of 5
 JAM72D20-xxx/MB/1500V, xxx=430 to 465 in steps of 5
 JAM60D20-xxx/MB, xxx=355 to 385 in steps of 5
 JAM60D20-xxx/MB/1500V, xxx=355 to 385 in steps of 5
 JAM6(K)-72-xxx/PR/1500V, xxx=345 to 370 in steps of 5
 JAM6(K)-60-xxx/PR/1500V, xxx=285 to 310 in steps of 5
 JAM6(K)-72-xxx/4BB/1500V, xxx=320 to 345 in steps of 5
 JAM6(K)-60-xxx/4BB/1500V, xxx=265 to 285 in steps of 5
 JAM72S01-xxx/SC/1500V, xxx=320 to 365 in steps of 5
 JAM60S01-xxx/SC/1500V, xxx=265 to 305 in steps of 5
 JAM72S01-xxx/PR, xxx=345 to 390 in steps of 5
 JAM60S01-xxx/PR/1500V, xxx=285 to 325 in steps of 5
 JAM72S03-xxx/PR/1500V, xxx=360 to 395 in steps of 5
 JAM60S03-xxx/PR/1500V, xxx=300 to 330 in steps of 5
 JAM72S09-xxx/PR/1500V, xxx=370 to 405 in steps of 5
 JAM60S09-xxx/PR/1500V, xxx=310 to 335 in steps of 5
 JAM72S10-xxx/PR/1500V, xxx=380 to 410 in steps of 5
 JAM60S10-xxx/PR/1500V, xxx=315 to 345 in steps of 5
 JAM78S10-xxx/MR/1500V, xxx=435 to 465 in steps of 5
 JAM66S10-xxx/MR/1500V, xxx=345 to 390 in steps of 5
 JAM72S09-xxx/BP/1500V, xxx=375 to 385 in steps of 5
 JAM60S09-xxx/BP/1500V, xxx=315 to 320 in steps of 5
 JAM72S10-xxx/BP/1500V, xxx=385 to 400 in steps of 5
 JAM60S10-xxx/BP/1500V, xxx=320 to 330 in steps of 5
 JAM72S10-xxx/MB/1500V, xxx=395 to 415 in steps of 5
 JAM60S10-xxx/MB/1500V, xxx=330 to 345 in steps of 5
 JAM72S20-xxx/MR/1500V, xxx=430 to 470 in steps of 5
 JAM60S20-xxx/MR/1500V, xxx=355 to 390 in steps of 5
 JAM72S30-xxx/MR/1500V, xxx=510 to 555 in steps of 5
 JAM66S30-xxx/MR/1500V, xxx=470 to 505 in steps of 5
 JAM60S30-xxx/MR/1500V, xxx=435 to 460 in steps of 5
 JAM54S30-xxx/MR/1500V, xxx=390 to 425 in steps of 5
 JAM60S21-xxx/MR/1500V, xxx=355 to 390 in steps of 5
 JAM72D30-xxx/MB, xxx=505 to 555 in steps of 5
 JAM72D30-xxx/MB/1500V, xxx=505 to 555 in steps of 5
 JAM66D30-xxx/MB, xxx=465 to 505 in steps of 5
 JAM66D30-xxx/MB/1500V, xxx=465 to 505 in steps of 5
 JAM60D30-xxx/MB, xxx=435 to 460 in steps of 5
 JAM60D30-xxx/MB/1500V, xxx=435 to 460 in steps of 5
 JAM54D30-xxx/MB, xxx=390 to 415 in steps of 5
 JAM54D30-xxx/MB/1500V, xxx=390 to 415 in steps of 5
 JAM54D31-xxx/MB, xxx=395 to 400 in steps of 5
 JAM54D31-xxx/MB/1500V, xxx=395 to 400 in steps of 5
 JAM72S20-xxx/MB/1500V, xxx=450 to 465 in steps of 5
 JAM60S20-xxx/MB/1500V, xxx=375 to 390 in steps of 5
 JAM76S11-xxxPR(B)/1500V, xxx=395 to 415 in steps of 5
 JAM78D30-xxx/GB, JAM78D30-xxx/GB/1500V, xxx=585 to 595 in steps of 5
 JAM72D30-xxx/GB, JAM72D30-xxx/GB/1500V, xxx=540 to 560 in steps of 5
 JAM66D30-xxx/GB, JAM66D30-xxx/GB/1500V, xxx=495 to 510 in steps of 5
 JAM60D30-xxx/GB, JAM60D30-xxx/GB/1500V, xxx=450 to 465 in steps of 5
 JAM54D30-xxx/GB, JAM54D30-xxx/GB/1500V, xxx=405 to 420 in steps of 5
 JAM54D31-xxx/GB, JAM54D30-xxx/GB/1500V, xxx=410 to 420 in steps of 5

CERTIFICATE

No. Z2 072092 0300 Rev. 20

JAM78S30-xxx/GR/1500V, xxx=575 to 600 in steps of 5
 JAM72S30-xxx/GR/1500V, xxx=535 to 560 in steps of 5
 JAM66S30-xxx/GR/1500V, xxx=500 to 510 in steps of 5
 JAM60S30-xxx/GR/1500V, xxx=445 to 465 in steps of 5
 JAM54S30-xxx/GR/1500V, xxx=400 to 420 in steps of 5
 JAM78S31-xxx/GR/1500V, xxx=570 to 590 in steps of 5
 JAM72S31-xxx/GR/1500V, xxx=525 to 545 in steps of 5
 JAM66S31-xxx/GR/1500V, xxx=480 to 500 in steps of 5
 JAM60S31-xxx/GR/1500V, xxx=435 to 450 in steps of 5
 JAM54S31-xxx/GR/1500V, xxx=395 to 405 in steps of 5
 JAM72S10-xxx/MR/1500V, xxx=390 to 430 in steps of 5
 JAM60S10-xxx/MR/1500V, xxx=325 to 355 in steps of 5
 JAM72S17-xxx/MR/1500V, xxx=390 to 430 in steps of 5
 JAM60S17-xxx/MR/1500V, xxx=315 to 355 in steps of 5
 JAM72S31-xxx/MR/1500V, xxx=510 to 545 in steps of 5
 JAM66S31-xxx/MR/1500V, xxx=470 to 500 in steps of 5
 JAM60S31-xxx/MR/1500V, xxx=425 to 450 in steps of 5
 JAM54S31-xxx/MR/1500V, xxx=385 to 405 in steps of 5
 JAM78S30-xxx/MR/1500V, xxx=580 to 605 in steps of 5
 JAM72S17-xxx/GR/1500V, xxx=385 to 400 in steps of 5
 JAM78D30-xxx/MB, JAM78D30-xxx/MB/1500V, xxx=580 to 605 in steps of 5
 JAM72D30-xxx/HB, JAM72D30-xxx/HB/1500V, xxx=530 to 560 in steps of 5
 JAM78D40-xxx/MB, xxx=580 to 630 in steps of 5
 JAM72D40-xxx/MB/1500V, xxx=580 to 630 in steps of 5
 JAM72D40-xxx/MB, xxx=540 to 580 in steps of 5
 JAM72D40-xxx/MB/1500V, xxx=540 to 580 in steps of 5
 JAM66D40-xxx/MB, xxx=500 to 530 in steps of 5
 JAM66D40-xxx/MB/1500V, xxx=500 to 530 in steps of 5
 JAM60D40-xxx/MB, xxx=455 to 480 in steps of 5
 JAM60D40-xxx/MB/1500V, xxx=455 to 480 in steps of 5
 JAM54D40-xxx/MB, xxx=405 to 435 in steps of 5
 JAM54D40-xxx/MB/1500V, xxx=405 to 435 in steps of 5
 JAM78D40-xxx/GB, xxx= 580 to 635 in steps of 5
 JAM78D40-xxx/GB/1500V, xxx= 580 to 635 in steps of 5
 JAM72D40-xxx/GB, xxx= 540 to 585 in steps of 5
 JAM72D40-xxx/GB/1500V, xxx= 540 to 585 in steps of 5
 JAM66D40-xxx/GB, xxx= 500 to 535 in steps of 5
 JAM66D40-xxx/GB/1500V, xxx= 500 to 535 in steps of 5
 JAM60D40-xxx/GB, xxx= 455 to 485 in steps of 5
 JAM60D40-xxx/GB/1500V, xxx= 455 to 485 in steps of 5
 JAM54D40-xxx/GB, xxx= 405 to 440 in steps of 5
 JAM54D40-xxx/GB/1500V, xxx= 405 to 440 in steps of 5
 JAM54D41-xxx/GB, xxx= 415 to 435 in steps of 5
 JAM54D41-xxx/GB/1500V, xxx= 415 to 435 in steps of 5
 JAM72S40-xxx/GR/1500V, xxx=540 to 575 in steps of 5
 JAM66S40-xxx/GR/1500V, xxx=495 to 525 in steps of 5
 JAM60S40-xxx/GR/1500V, xxx=450 to 480 in steps of 5
 JAM54S40-xxx/GR/1500V, xxx=405 to 430 in steps of 5
 JAM72S41-xxx/GR/1500V, xxx=540 to 570 in steps of 5
 JAM66S41-xxx/GR/1500V, xxx=495 to 525 in steps of 5
 JAM60S41-xxx/GR/1500V, xxx=450 to 475 in steps of 5
 JAM54S41-xxx/GR/1500V, xxx=405 to 430 in steps of 5
 JAM66D35-xxx/MB/1500V, JAM66D35-xxx/MB, xxx= 650 to 665 in steps of 5;
 JAM60D35-xxx/MB/1500V, JAM60D35-xxx/MB, xxx= 590 to 605 in steps of 5;
 JAM72D30-xxx /TB/1500V, JAM72D30-xxx /TB, xxx= 540 to 580 in steps of 5;
 JAM66S35-xxx/MR/1500V, xxx= 650 to 670 in steps of 5;
 JAM60S35-xxx/MR/1500V, xxx= 590 to 610 in steps of 5;
 Maximum System Voltage: 1000 or 1500 V DC
 JAM72S01-xxx/SC, xxx=320 to 365 in steps of 5
 JAM60S01-xxx/SC, xxx=265 to 305 in steps of 5
 JAM60S01-xxx/PR, xxx=285 to 325 in steps of 5
 JAM72S03-xxx/PR, xxx=360 to 395 in steps of 5
 JAM60S03-xxx/PR, xxx=300 to 330 in steps of 5
 JAM72S09-xxx/PR, xxx=370 to 405 in steps of 5
 JAM60S09-xxx/PR, xxx=310 to 335 in steps of 5
 JAM72S10-xxx/PR, xxx=380 to 410 in steps of 5
 JAM60S10-xxx/PR, xxx=315 to 345 in steps of 5
 JAM72S10-xxx/MR, xxx=390 to 430 in steps of 5
 JAM60S10-xxx/MR, xxx=325 to 355 in steps of 5
 JAM78S10-xxx/MR, xxx=435 to 465 in steps of 5

CERTIFICATE

No. Z2 072092 0300 Rev. 20

JAM66S10-xxx/MR, xxx=345 to 390 in steps of 5
 JAM72S09-xxx/BP, xxx=375 to 385 in steps of 5
 JAM60S09-xxx/BP, xxx=315 to 320 in steps of 5
 JAM72S10-xxx/BP, xxx=385 to 400 in steps of 5
 JAM60S10-xxx/BP, xxx=320 to 330 in steps of 5
 JAM72S10-xxx/MB, xxx=395 to 415 in steps of 5
 JAM60S10-xxx/MB, xxx=330 to 345 in steps of 5
 JAM72S20-xxx/MR, xxx=430 to 470 in steps of 5
 JAM60S20-xxx/MR, xxx=355 to 390 in steps of 5
 JAM78S10-xxx/MR-J, xxx=435 to 465 in steps of 5
 JAM72S30-xxx/MR, xxx=510 to 555 in steps of 5
 JAM66S30-xxx/MR, xxx=470 to 505 in steps of 5
 JAM60S30-xxx/MR, xxx=435 to 460 in steps of 5
 JAM60S21-xxx/MR, xxx=355 to 390 in steps of 5
 JAM54S30-xxx/MR, xxx=390 to 425 in steps of 5
 JAM68S11-xxx/PR(B), xxx=345 to 365 in steps of 5
 JAM72S20-xxx/MB, xxx=450 to 465 in steps of 5
 JAM60S20-xxx/MB, xxx=375 to 390 in steps of 5
 JAM76S11-xxx/PR(B), xxx=395 to 415 in steps of 5
 JAM78S30-xxx/GR, xxx=575 to 600 in steps of 5
 JAM72S30-xxx/GR, xxx=535 to 560 in steps of 5
 JAM66S30-xxx/GR, xxx=500 to 510 in steps of 5
 JAM60S30-xxx/GR, xxx=445 to 465 in steps of 5
 JAM54S30-xxx/GR, xxx=400 to 420 in steps of 5
 JAM78S31-xxx/GR, xxx=570 to 590 in steps of 5
 JAM72S31-xxx/GR, xxx=525 to 545 in steps of 5
 JAM66S31-xxx/GR, xxx=480 to 500 in steps of 5
 JAM60S31-xxx/GR, xxx=435 to 450 in steps of 5
 JAM54S31-xxx/GR, xxx=395 to 405 in steps of 5
 JAM72S31-xxx/MR, xxx=510 to 545 in steps of 5
 JAM66S31-xxx/MR, xxx=470 to 500 in steps of 5
 JAM60S31-xxx/MR, xxx=425 to 450 in steps of 5
 JAM54S31-xxx/MR, xxx=385 to 405 in steps of 5
 JAM72S17-xxx/MR, xxx=390 to 430 in steps of 5
 JAM60S17-xxx/MR, xxx=315 to 355 in steps of 5
 JAM78S30-xxx/MR, xxx=580 to 605 in steps of 5
 JAM72S17-xxx/GR, xxx=385 to 400 in steps of 5
 JAM72S40-xxx/GR, xxx=540 to 575 in steps of 5
 JAM66S40-xxx/GR, xxx=495 to 525 in steps of 5
 JAM60S40-xxx/GR, xxx=450 to 480 in steps of 5
 JAM54S40-xxx/GR, xxx=405 to 430 in steps of 5
 JAM72S41-xxx/GR, xxx=540 to 570 in steps of 5
 JAM66S41-xxx/GR, xxx=495 to 525 in steps of 5
 JAM60S41-xxx/GR, xxx=450 to 475 in steps of 5
 JAM54S41-xxx/GR, xxx=405 to 430 in steps of 5
 JAM66S35-xxx/MR, xxx= 650 to 670 in steps of 5
 JAM60S35-xxx/MR, xxx= 590 to 610 in steps of 5
 xxx is standing for rated output power at STC

Parameters:

Construction:	Framed or Frameless, with Junction box, cable and Connectors.
Fire Safety Class:	Class C or Class A according to UL790.
Safety Class:	Class II
Maximum System Voltage:	1000 V DC or 1500V DC
PID Test Condition:	±1000 V DC, 96h, 60°C, 85% RH or 96h, 85°C, 85% RH ±1500 V DC, 96h, 85°C, 85% RH
PID testing method according to IEC TS 62804-1:2015	
Production Facility(ies):	072092, 079395, 090968, 095903, 108746, 109998, 112017, 113943, 114922, 001783, 004170, 113691



CERTIFICATE

No. Z2 072092 0300 Rev. 20

**Tested
according to:**

IEC 61215-1(ed.1)
IEC 61215-1-1(ed.1)
IEC 61215-2(ed.1)
IEC 61730-1(ed.2)
IEC 61730-2(ed.2)
PPP 58042B:2015

CERTIFICATE

TÜV NORD CERT GmbH

herewith declares that

Shanghai JA Solar Technology Co., Ltd.

No. 118, Lane 3111, West Huancheng Road,
Fengxian District, Shanghai, 201401,
P.R. China

is authorized to provide the product mentioned below with the mark as illustrated:

Description of product (details see Annex 2):

Crystalline Silicon Terrestrial Photovoltaic (PV) Modules



Valid from: 2022-12-01

Valid until: 2026-04-15

Certification program:	P12-VA-01 Rev. 17 09.20
Certification fundamental(s):	P12.4-AA-08 Rev. 01 (IEC 61701:2020 modified)
Remark:	Test Method 6
	Test duration: 1344 hours
Registered No.:	44 780 21 406749 - 051R3A3M5
Manufacturer:	see Annex 1
Test Report No.:	492011627.006
File No.:	PVP08030/22P-01



TÜV NORD CERT GmbH
Certification Body
Consumer Products



Essen, 2022-12-01

Please also pay attention to the information stated overleaf.

Manufacturer:

Manufacturer 1:	Shanghai JA Solar Technology Co., Ltd. No. 118, Lane 3111, West Huancheng Road, Fengxian District Shanghai 201401, P.R. China
Factory inspection report no.:	862010153.010
Manufacturer 2:	Hefei JA Solar Technology Co., Ltd. No. 999, Chang Ning Road, Hi-tech Zone, Hefei 230088, P.R. China
Factory inspection report no.:	862010241.009
Manufacturer 3:	JA Solar (Xingtai) Co., Ltd. No. 1688, Chang An Road, Xingtai Economic Development Area Xingtai City, Hebei Province, 054001, P.R. China
Factory inspection report no.:	862010290.007
Manufacturer 4:	Vina Solar Technology Co., Ltd. E12 factory, lot CN-03, Van Trung Industrial park 21000 Bac Giang Province, Vietnam
Factory inspection report no.:	862010302.006
Manufacturer 5:	JA Solar New Energy Yangzhou Co., Ltd. No.1, Jianhua Road, Economic Development Zone Yangzhou, Jiangsu Province, 225000, P.R. China
Factory inspection report no.:	862010496.003
Manufacturer 6:	Yiwu JA Solar Technology Co., Ltd. No. 165, Tongze Road, Yiting Town, Yiwu City, Zhejiang Province, 322000, P.R. China.
Factory inspection report no.:	862010513.003
Manufacturer 7:	JA Solar Viet Nam Company Limited Lot G, Quang Chau Industrial Zone, Quang Chau Commune Viet Yen Dist, 236110 Bac Giang Province, VIETNAM.
Factory inspection report no.:	862010560.002



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Manufacturer 8: **JA Solar New Energy Yangzhou Co., Ltd. (Jingshan Park)**
No.123, Jinshan Road, Economic Development Zone,
Yangzhou, Jiangsu Province, 225127, P.R. China

Factory inspection report no.: **862010584.002**

Remark:

Factory inspection is mandatory to be performed annually. Please refer to factory inspection report for detailed information.



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Description of product(s):

Module types:

PV Modules with Mono-crystalline Silicon Solar Cells (156mm to 158.75mm):

72 cells: JAM6(L)-72- xxx (xxx=295-335, in steps of 5)
72 cells: JAM6-72- xxx/SI (xxx=285-325, in steps of 5)
72 cells: JAM6(R)-72-xxx (xxx=295-340, in steps of 5)
72 cells: JAM6(R)-72-xxx/PR (xxx=330-350, in steps of 5)
72 cells: JAM6-72-xxx/PR (xxx=325-345, in steps of 5)
72 cells: JAM6(L)-72-xxx/PR (xxx=325-345, in steps of 5)
72 cells: JAM6(K)-72-xxx/4BB (xxx=320-345, in steps of 5)
72 cells: JAM6(K)-72-xxx/PR (xxx=325-370, in steps of 5)
72 cells: JAM72S02-xxx/PR (xxx=325-390, in steps of 5)
72 cells: JAM72S01-xxx/PR/1000V (xxx=345-390, in steps of 5)
72 cells: JAM72S01-xxx/SC/1000V (xxx=320-365, in steps of 5)
72 cells: JAM72S01-xxx/MR/1000V (xxx=365-385, in steps of 5)
72 cells: JAM72S09-xxx/PR/1000V (xxx=370-405, in steps of 5)
72 cells: JAM72S09-xxx/BP/1000V (xxx=375-385, in steps of 5)
72 cells: JAM72S02-xxx/PR/1000V (xxx=345-390, in steps of 5)
72 cells: JAM72S02-xxx/SC/1000V (xxx=320-365, in steps of 5)
72 cells: JAM72S02-xxx/MR/1000V (xxx=365-385, in steps of 5)
72 cells: JAM72S12-xxx/PR/1000V (xxx=365-385, in steps of 5)
60 cells: JAM6(L)-60-xxx (xxx=255-280, in steps of 5)
60 cells: JAM6-60-xxx/SI (xxx=235-280, in steps of 5)
60 cells: JAM6(FA)-60-xxx/SI (xxx=255-275, in steps of 5)
60 cells: JAM6(R)(FA)-60-xxx (xxx=260-280, in steps of 5)
60 cells: JAM6(R)-60-xxx (xxx=255-280, in steps of 5)
60 cells: JAM6(R)-60-xxx/PR (xxx=280-300, in steps of 5)
60 cells: JAM6-60-xxx/PR (xxx=275-295, in steps of 5)
60 cells: JAM6(L)-60-xxx/PR (xxx=270-295, in steps of 5)
60 cells: JAM6(K)-60-xxx/4BB (xxx=265-285, in steps of 5)
60 cells: JAM6(K)-60-xxx/PR (xxx=275-310, in steps of 5)
60 cells: JAM60S02-xxx/PR (xxx=280-325, in steps of 5)
60 cells: JAM60S01-xxx/PR/1000V (xxx=285-325, in steps of 5)
60 cells: JAM60S01-xxx/SC/1000V (xxx=265-305, in steps of 5)
60 cells: JAM60S01-xxx/MR/1000V (xxx=305-320, in steps of 5)
60 cells: JAM60S09-xxx/PR/1000V (xxx=310-335, in steps of 5)
60 cells: JAM60S09-xxx/BP/1000V (xxx=315-320, in steps of 5)
60 cells: JAM60S02-xxx/PR/1000V (xxx=285-325, in steps of 5)
60 cells: JAM60S02-xxx/SC/1000V (xxx=265-305, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

60 cells: JAM60S02-xxx/MR/1000V (xxx=305-320, in steps of 5)
60 cells: JAM60S12-xxx/PR/1000V (xxx=305-330, in steps of 5)
48 cells: JAM6(FA)-48-xxx/SI (xxx=205-220, in steps of 5)
48 cells: JAM6(R)(FA)-48-xxx (xxx=210-225, in steps of 5)
48 cells: JAM6(R)-48-xxx/PR (xxx=220-235, in steps of 5)
48 cells: JAM6-48-xxx/PR (xxx=215-235, in steps of 5)
48 cells: JAM6(L)-48-xxx/PR (xxx=215-235, in steps of 5)
48 cells: JAM6(K)-48xxx/4BB (xxx=210-225, in steps of 5)
48 cells: JAM6(K)-48-xxx/PR (xxx=220-235, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types:

PV Modules with 125mm Mono-crystalline Silicon Solar Cells:

72 cells: JAM5-72-xxx/SI (xxx=180-210, in steps of 5)
72 cells: JAM5(L)-72-xxx/SI (xxx=180-220, in steps of 5)
72 cells: JAM5(R)-72-xxx (xxx=195-220, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 10A
Application class: Class A
Electrical protection class: Class II

Module types:

PV Modules with Mono-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):

72 cells: JAM72S03-xxx/PR/1000V (xxx=360-395, in steps of 5)
72 cells: JAM72S10-xxx/PR/1000V (xxx=380-410, in steps of 5)
72 cells: JAM72S10-xxx/BP/1000V (xxx=385-400, in steps of 5)
72 cells: JAM72S10-xxx/MR/1000V (xxx=390-430, in steps of 5)
72 cells: JAM72S10-xxx/MB/1000V (xxx=395-415, in steps of 5)
72 cells: JAM72S08-xxx/PR/1000V (xxx=360-395, in steps of 5)
72 cells: JAM72S17-xxx/PR/1000V (xxx=380-390, in steps of 5)
72 cells: JAM72S17-xxx/MR/1000V (xxx=390-430, in steps of 5)
72 cells: JAM72S17-xxx/GR/1000V (xxx=385-400, in steps of 5)
60 cells: JAM60S03-xxx/PR/1000V (xxx=300-330, in steps of 5)
60 cells: JAM60S10-xxx/PR/1000V (xxx=315-345, in steps of 5)
60 cells: JAM60S10-xxx/BP/1000V (xxx=320-330, in steps of 5)
60 cells: JAM60S10-xxx/MR/1000V (xxx=325-355, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

	60 cells: JAM60S10-xxx/MB/1000V (xxx=330-345, in steps of 5)
	60 cells: JAM60S08-xxx/PR/1000V (xxx=300-330, in steps of 5)
	60 cells: JAM60S17-xxx/PR/1000V (xxx=315-325, in steps of 5)
	60 cells: JAM60S17-xxx/MR/1000V (xxx=315-355, in steps of 5)
	78 cells: JAM78S10-xxx/MR/1000V (xxx=435-465, in steps of 5)
	66 cells: JAM66S10-xxx/MR/1000V (xxx=345-390, in steps of 5)
Maximum system voltage:	1000V
Fuse rating:	20A
Application class:	Class A
Electrical protection class:	Class II

Module types: **PV Modules with Mono-crystalline Silicon half-cut Solar Cells (166mm to 168mm):**

	72 cells: JAM72S20-xxx/MR/1000V (xxx=430-470, in steps of 5)
	72 cells: JAM72S20-xxx/MB/1000V (xxx=450-465, in steps of 5)
	60 cells: JAM60S20-xxx/MR/1000V (xxx=355-390, in steps of 5)
	60 cells: JAM60S21-xxx/MR/1000V (xxx=355-390, in steps of 5)
	60 cells: JAM60S20-xxx/MB/1000V (xxx=375-390, in steps of 5)
Maximum system voltage:	1000V
Fuse rating:	25A
Application class:	Class A
Electrical protection class:	Class II

Module types: **PV Modules with 182mm Mono-crystalline Silicon half-cut Solar Cells:**

60 cells: JAM60S30-xxx/MR/1000V (xxx=435-460, in steps of 5)
66 cells: JAM66S30-xxx/MR/1000V (xxx=470-505, in steps of 5)
72 cells: JAM72S30-xxx/MR/1000V (xxx=510-555, in steps of 5)
78 cells: JAM78S30-xxx/MR/1000V (xxx=580-605, in steps of 5)
54 cells: JAM54S30-xxx/MR/1000V (xxx=390-415, in steps of 5)
78 cells: JAM78S30-xxx/GR/1000V (xxx=575-600, in steps of 5)
72 cells: JAM72S30-xxx/GR/1000V (xxx=535-560, in steps of 5)
66 cells: JAM66S30-xxx/GR/1000V (xxx=500-510, in steps of 5)
60 cells: JAM60S30-xxx/GR/1000V (xxx=445-465, in steps of 5)
54 cells: JAM54S30-xxx/GR/1000V (xxx=400-420, in steps of 5)
72 cells: JAM72S31-xxx/MR/1000V (xxx=510-545, in steps of 5)
66 cells: JAM66S31-xxx/MR/1000V (xxx=470-500, in steps of 5)
60 cells: JAM60S31-xxx/MR/1000V (xxx=425-450, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

54 cells: JAM54S31-xxx/MR/1000V (xxx=385-405, in steps of 5)
 78 cells: JAM78S31-xxx/GR/1000V (xxx=570-590, in steps of 5)
 72 cells: JAM72S31-xxx/GR/1000V (xxx=525-545, in steps of 5)
 66 cells: JAM66S31-xxx/GR/1000V (xxx=480-500, in steps of 5)
 60 cells: JAM60S31-xxx/GR/1000V (xxx=435-450, in steps of 5)
 54 cells: JAM54S31-xxx/GR/1000V (xxx=395-405, in steps of 5)
 72 cells: JAM72S40-xxx/GR/1000V (xxx=545-570, in steps of 5)
 66 cells: JAM66S40-xxx/GR/1000V (xxx=500-525, in steps of 5)
 60 cells: JAM60S40-xxx/GR/1000V (xxx=455-475, in steps of 5)
 54 cells: JAM54S40-xxx/GR/1000V (xxx=410-430, in steps of 5)
 72 cells: JAM72S41-xxx/GR/1000V (xxx=540-570, in steps of 5)
 66 cells: JAM66S41-xxx/GR/1000V (xxx=495-525, in steps of 5)
 60 cells: JAM60S41-xxx/GR/1000V (xxx=450-475, in steps of 5)
 54 cells: JAM54S41-xxx/GR/1000V (xxx=405-430, in steps of 5)

Maximum system voltage: 1000V
 Fuse rating: 25A
 Application class: Class A
 Electrical protection class: Class II

Module types: **PV Modules with 210mm Mono-crystalline Silicon 1/3-cut Solar Cells:**

50 cells: JAM50S40-xxx/MR/1000V (xxx=490-500, in steps of 5)

Maximum system voltage: 1000V
 Fuse rating: 25A
 Application class: Class A
 Electrical protection class: Class II

Module types: **PV Modules with 182mm Mono-crystalline Silicon 1/5-cut Solar Cells:**

76 cells: JAM76S11-xxx/PR(B)/1000V (xxx=395-415, in steps of 5)

Maximum system voltage: 1000V
 Fuse rating: 25A
 Application class: Class A
 Electrical protection class: Class II



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Module types:

PV Modules with Poly-crystalline Silicon Solar Cells (156mm to 158.75mm):

72 cells: JAP6-72-xxx/3BB (xxx=250-330, in steps of 5)
72 cells: JAP6-72-xxx/4BB (xxx=305-330, in steps of 5)
72 cells: JAP6-72-xxx/RE (xxx=305-330, in steps of 5)
72 cells: JAP6-72-xxx/4BB/RE (xxx=305-330, in steps of 5)
72 cells: JAP6(K)-72-xxx/4BB (xxx=310-330, in steps of 5)
72 cells: JAP72S01-xxx/SC/1000V (xxx=310-345, in steps of 5)
72 cells: JAP72S01-xxx/PR/1000V (xxx=330-345, in steps of 5)
72 cells: JAP72S09-xxx/SC/1000V (xxx=320-345, in steps of 5)
72 cells: JAP72S01-xxx/MS/1000V (xxx=325-340, in steps of 5)
72 cells: JAP72S02-xxx/SC/1000V (xxx=310-345, in steps of 5)
72 cells: JAP72S02-xxx/PR/1000V (xxx=330-345, in steps of 5)
60 cells: JAP6-60-xxx/3BB (xxx=240-275, in steps of 5)
60 cells: JAP6(FA)-60-xxx/3BB (xxx=250-270, in steps of 5)
60 cells: JAP6-60-xxx/4BB (xxx=250-275, in steps of 5)
60 cells: JAP6-60-xxx/RE (xxx=255-280, in steps of 5)
60 cells: JAP6-60-xxx/4BB/RE (xxx=255-280, in steps of 5)
60 cells: JAP6(K)-60-xxx/4BB (xxx=255-275, in steps of 5)
60 cells: JAP60S01-xxx/SC/1000V (xxx=255-290, in steps of 5)
60 cells: JAP60S01-xxx/PR/1000V (xxx=275-285, in steps of 5)
60 cells: JAP60S09-xxx/SC/1000V (xxx=265-290, in steps of 5)
60 cells: JAP60S01-xxx/MS/1000V (xxx=270-280, in steps of 5)
60 cells: JAP60S02-xxx/SC/1000V (xxx=255-290, in steps of 5)
60 cells: JAP60S02-xxx/PR/1000V (xxx=275-285, in steps of 5)
54 cells: JAP54S01-xxx/SC (xxx=245-255, in steps of 5)
48 cells: JAP6(FA)-48-xxx/3BB (xxx=200-220, in steps of 5)
48 cells: JAP6-48-xxx/3BB (xxx=200-220, in steps of 5)

Maximum system voltage:

1000V

Fuse rating:

20A

Application class:

Class A

Electrical protection class:

Class II

Module types:

PV Modules with Poly-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):

72 cells: JAP72S03-xxx/SC/1000V (xxx=320-345, in steps of 5)
72 cells: JAP72S03-xxx/PR/1000V (xxx=335-355, in steps of 5)
72 cells: JAP72S10-xxx/SC/1000V (xxx=335-350, in steps of 5)
72 cells: JAP72S03-xxx/MS/1000V (xxx=320-345, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

72 cells: JAP72S08-xxx/SC/1000V (xxx=320-345, in steps of 5)
72 cells: JAP72S08-xxx/PR/1000V (xxx=335-355, in steps of 5)
60 cells: JAP60S03-xxx/SC/1000V (xxx=270-290, in steps of 5)
60 cells: JAP60S03-xxx/PR/1000V (xxx=280-295, in steps of 5)
60 cells: JAP60S10-xxx/SC/1000V (xxx=275-290, in steps of 5)
60 cells: JAP60S03-xxx/MS/1000V (xxx=270-285, in steps of 5)
60 cells: JAP60S08-xxx/SC/1000V (xxx=270-290, in steps of 5)
60 cells: JAP60S08-xxx/PR/1000V (xxx=280-295, in steps of 5)

Maximum system voltage: 1000V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Mono-crystalline Silicon Solar Cells (156mm to 158.75mm):**

72 cells: JAM6(K)-72-xxx/PR/1500V (xxx=345-370, in steps of 5)
72 cells: JAM6(K)-72-xxx/4BB/1500V (xxx=320-345, in steps of 5)
72 cells: JAM72S01-xxx/PR (xxx=345-390, in steps of 5)
72 cells: JAM72S01-xxx/SC/1500V (xxx=320-365, in steps of 5)
72 cells: JAM72S01-xxx/MR/1500V (xxx=365-385, in steps of 5)
72 cells: JAM72S09-xxx/PR/1500V (xxx=370-405, in steps of 5)
72 cells: JAM72S09-xxx/BP/1500V (xxx=375-385, in steps of 5)
72 cells: JAM72S02-xxx/PR/1500V (xxx=345-390, in steps of 5)
72 cells: JAM72S02-xxx/SC/1500V (xxx=320-365, in steps of 5)
72 cells: JAM72S02-xxx/MR/1500V (xxx=365-385, in steps of 5)
72 cells: JAM72S12-xxx/PR/1500V (xxx=365-385, in steps of 5)
60 cells: JAM6(K)-60-xxx/PR/1500V (xxx=285-310, in steps of 5)
60 cells: JAM6(K)-60-xxx/4BB/1500V (xxx=265-285, in steps of 5)
60 cells: JAM60S01-xxx/PR/1500V (xxx=285-325, in steps of 5)
60 cells: JAM60S01-xxx/SC/1500V (xxx=265-305, in steps of 5)
60 cells: JAM60S01-xxx/MR/1500V (xxx=305-320, in steps of 5)
60 cells: JAM60S09-xxx/PR/1500V (xxx=310-335, in steps of 5)
60 cells: JAM60S09-xxx/BP/1500V (xxx=315-320, in steps of 5)
60 cells: JAM60S02-xxx/PR/1500V (xxx=285-325, in steps of 5)
60 cells: JAM60S02-xxx/SC/1500V (xxx=265-305, in steps of 5)
60 cells: JAM60S02-xxx/MR/1500V (xxx=305-320, in steps of 5)
60 cells: JAM60S12-xxx/PR/1500V (xxx=305-330, in steps of 5)

Maximum system voltage: 1500V



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Mono-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):**

72 cells: JAM72S03-xxx/PR/1500V (xxx=360-395, in steps of 5)
72 cells: JAM72S10-xxx/PR/1500V (xxx=380-410, in steps of 5)
72 cells: JAM72S10-xxx/BP/1500V (xxx=385-400, in steps of 5)
72 cells: JAM72S10-xxx/MR/1500V (xxx=390-430, in steps of 5)
72 cells: JAM72S10-xxx/MB/1500V (xxx=395-415, in steps of 5)
72 cells: JAM72S08-xxx/PR/1500V (xxx=360-395, in steps of 5)
72 cells: JAM72S17-xxx/PR/1500V (xxx=380-390, in steps of 5)
72 cells: JAM72S17-xxx/MR/1500V (xxx=390-430, in steps of 5)
72 cells: JAM72S17-xxx/GR/1500V (xxx=385-400, in steps of 5)
60 cells: JAM60S03-xxx/PR/1500V (xxx=300-330, in steps of 5)
60 cells: JAM60S10-xxx/PR/1500V (xxx=315-345, in steps of 5)
60 cells: JAM60S10-xxx/BP/1500V (xxx=320-330, in steps of 5)
60 cells: JAM60S10-xxx/MR/1500V (xxx=325-355, in steps of 5)
60 cells: JAM60S10-xxx/MB/1500V (xxx=330-345, in steps of 5)
60 cells: JAM60S20-xxx/MR/1500V (xxx=355-390, in steps of 5)
60 cells: JAM60S21-xxx/MR/1500V (xxx=355-390, in steps of 5)
60 cells: JAM60S08-xxx/PR/1500V (xxx=300-330, in steps of 5)
60 cells: JAM60S17-xxx/PR/1500V (xxx=315-325, in steps of 5)
60 cells: JAM60S17-xxx/MR/1500V (xxx=315-355, in steps of 5)
78 cells: JAM78S10-xxx/MR/1500V (xxx=435-465, in steps of 5)
66 cells: JAM66S10-xxx/MR/1500V (xxx=345-390, in steps of 5)

Maximum system voltage: 1500V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Mono-crystalline Silicon half-cut Solar Cells (166mm to 168mm):**

72 cells: JAM72S20-xxx/MR/1500V (xxx=430-470, in steps of 5)
72 cells: JAM72S20-xxx/MB/1500V (xxx=450-465, in steps of 5)
60 cells: JAM60S20-xxx/MB/1500V (xxx=375-390, in steps of 5)

Maximum system voltage: 1500V



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Fuse rating: 25A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with 182mm Mono-crystalline Silicon half-cut Solar Cells:**

72 cells: JAM72S30-xxx/MR/1500V (xxx=510-555, in steps of 5)
66 cells: JAM66S30-xxx/MR/1500V (xxx=470-505, in steps of 5)
60 cells: JAM60S30-xxx/MR/1500V (xxx=435-460, in steps of 5)
54 cells: JAM54S30-xxx/MR/1500V (xxx=390-415, in steps of 5)
78 cells: JAM78S30-xxx/MR/1500V (xxx=580-605, in steps of 5)
78 cells: JAM78S30-xxx/GR/1500V (xxx=575-600, in steps of 5)
72 cells: JAM72S30-xxx/GR/1500V (xxx=535-560, in steps of 5)
66 cells: JAM66S30-xxx/GR/1500V (xxx=500-510, in steps of 5)
60 cells: JAM60S30-xxx/GR/1500V (xxx=445-465, in steps of 5)
54 cells: JAM54S30-xxx/GR/1500V (xxx=400-420, in steps of 5)
72 cells: JAM72S31-xxx/MR/1500V (xxx=510-545, in steps of 5)
66 cells: JAM66S31-xxx/MR/1500V (xxx=470-500, in steps of 5)
60 cells: JAM60S31-xxx/MR/1500V (xxx=425-450, in steps of 5)
54 cells: JAM54S31-xxx/MR/1500V (xxx=385-405, in steps of 5)
78 cells: JAM78S31-xxx/GR/1500V (xxx=575-590, in steps of 5)
72 cells: JAM72S31-xxx/GR/1500V (xxx=525-545, in steps of 5)
66 cells: JAM66S31-xxx/GR/1500V (xxx=480-500, in steps of 5)
60 cells: JAM60S31-xxx/GR/1500V (xxx=435-450, in steps of 5)
54 cells: JAM54S31-xxx/GR/1500V (xxx=395-405, in steps of 5)
72 cells: JAM72S40-xxx/GR/1500V (xxx=545-570, in steps of 5)
66 cells: JAM66S40-xxx/GR/1500V (xxx=500-525, in steps of 5)
60 cells: JAM60S40-xxx/GR/1500V (xxx=455-475, in steps of 5)
54 cells: JAM54S40-xxx/GR/1500V (xxx=410-430, in steps of 5)
72 cells: JAM72S41-xxx/GR/1500V (xxx=540-570, in steps of 5)
66 cells: JAM66S41-xxx/GR/1500V (xxx=495-525, in steps of 5)
60 cells: JAM60S41-xxx/GR/1500V (xxx=450-475, in steps of 5)
54 cells: JAM54S41-xxx/GR/1500V (xxx=405-430, in steps of 5)

Maximum system voltage: 1500V
Fuse rating: 25A
Application class: Class A
Electrical protection class: Class II



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Module types: **PV Modules with 210mm Mono-crystalline Silicon 1/3-cut Solar Cells:**
50 cells: JAM50S40-xxx/MR/1500V (xxx=490-500, in steps of 5)

Maximum system voltage: 1500V

Fuse rating: 25A

Application class: Class A

Electrical protection class: Class II

Module types: **PV Modules with 182mm Mono-crystalline Silicon 1/5-cut Solar Cells:**
76 cells: JAM76S11-xxx/PR(B)/1500V (xxx=395-415, in steps of 5)

Maximum system voltage: 1500V

Fuse rating: 25A

Application class: Class A

Electrical protection class: Class II

Module types: **PV Modules with Poly-crystalline Silicon Solar Cells (156mm to 158.75mm):**
72 cells: JAP6(K)-72-xxx/4BB/1500V (xxx=310-330, in steps of 5)
72 cells: JAP72S01-xxx/SC/1500V (xxx=310-345, in steps of 5)
72 cells: JAP72S01-xxx/PR/1500V (xxx=330-345, in steps of 5)
72 cells: JAP72S09-xxx/SC/1500V (xxx=320-345, in steps of 5)
72 cells: JAP72S01-xxx/MS/1500V (xxx=325-340, in steps of 5)
72 cells: JAP72S02-xxx/SC/1500V (xxx=310-345, in steps of 5)
72 cells: JAP72S02-xxx/PR/1500V (xxx=330-345, in steps of 5)
60 cells: JAP6(K)-60-xxx/4BB/1500V (xxx=255-275, in steps of 5)
60 cells: JAP60S01-xxx/SC/1500V (xxx=255-290, in steps of 5)
60 cells: JAP60S01-xxx/PR/1500V (xxx=275-285, in steps of 5)
60 cells: JAP60S09-xxx/SC/1500V (xxx=265-290, in steps of 5)
60 cells: JAP60S01-xxx/MS/1500V (xxx=270-280, in steps of 5)
60 cells: JAP60S02-xxx/SC/1500V (xxx=255-290, in steps of 5)
60 cells: JAP60S02-xxx/PR/1500V (xxx=275-285, in steps of 5)

Maximum system voltage: 1500V

Fuse rating: 20A

Application class: Class A

Electrical protection class: Class II



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Module types:

PV Modules with Poly-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):

72 cells: JAP72S03-xxx/SC/1500V (xxx=320-345, in steps of 5)
72 cells: JAP72S03-xxx/PR/1500V (xxx=335-355, in steps of 5)
72 cells: JAP72S10-xxx/SC/1500V (xxx=335-350, in steps of 5)
72 cells: JAP72S03-xxx/MS/1500V (xxx=320-345, in steps of 5)
72 cells: JAP72S08-xxx/SC/1500V (xxx=320-345, in steps of 5)
72 cells: JAP72S08-xxx/PR/1500V (xxx=335-355, in steps of 5)
60 cells: JAP60S03-xxx/SC/1500V (xxx=270-290, in steps of 5)
60 cells: JAP60S03-xxx/PR/1500V (xxx=280-295, in steps of 5)
60 cells: JAP60S10-xxx/SC/1500V (xxx=275-290, in steps of 5)
60 cells: JAP60S03-xxx/MS/1500V (xxx=270-285, in steps of 5)
60 cells: JAP60S08-xxx/SC/1500V (xxx=270-290, in steps of 5)
60 cells: JAP60S08-xxx/PR/1500V (xxx=280-295, in steps of 5)

Maximum system voltage:

1500V

Fuse rating:

20A

Application class:

Class A

Electrical protection class:

Class II

Module types:

PV Modules with Mono-crystalline Silicon Solar Cells (156mm to 158.75mm):

72 cells: JAM72S01-xxx/SC (xxx=320-365, in steps of 5)
72 cells: JAM72S02-xxx/SC (xxx=320-365, in steps of 5)
72 cells: JAM72S02-xxx/PR (xxx=345-390, in steps of 5)
72 cells: JAM72S01-xxx/MR (xxx=365-385, in steps of 5)
72 cells: JAM72S02-xxx/MR (xxx=365-385, in steps of 5)
72 cells: JAM72S09-xxx/PR (xxx=370-405, in steps of 5)
72 cells: JAM72S12-xxx/PR (xxx=365-385, in steps of 5)
72 cells: JAM72S09-xxx/BP (xxx=375-385, in steps of 5)
60 cells: JAM60S01-xxx/SC (xxx=265-305, in steps of 5)
60 cells: JAM60S02-xxx/SC (xxx=265-305, in steps of 5)
60 cells: JAM60S01-xxx/PR (xxx=285-325, in steps of 5)
60 cells: JAM60S02-xxx/PR (xxx=285-325, in steps of 5)
60 cells: JAM60S01-xxx/MR (xxx=305-320, in steps of 5)
60 cells: JAM60S02-xxx/MR (xxx=305-320, in steps of 5)
60 cells: JAM60S09-xxx/PR (xxx=310-335, in steps of 5)
60 cells: JAM60S12-xxx/PR (xxx=305-330, in steps of 5)
60 cells: JAM60S09-xxx/BP (xxx=315-320, in steps of 5)

Maximum system voltage:

1000V or 1500V



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Mono-crystalline Silicon half-cut Solar Cells (156mm to 158.75mm):**

72 cells: JAM72S03-xxx/PR (xxx=360-395, in steps of 5)
72 cells: JAM72S10-xxx/PR (xxx=380-410, in steps of 5)
72 cells: JAM72S17-xxx/PR (xxx=380-390, in steps of 5)
72 cells: JAM72S10-xxx/MR (xxx=390-430, in steps of 5)
72 cells: JAM72S17-xxx/MR (xxx=390-430, in steps of 5)
72 cells: JAM72S17-xxx/GR (xxx=385-400, in steps of 5)
72 cells: JAM72S10-xxx/BP (xxx=385-400, in steps of 5)
72 cells: JAM72S10-xxx/MB (xxx=395-415, in steps of 5)
72 cells: JAM72S08-xxx/PR (xxx=360-395, in steps of 5)
60 cells: JAM60S03-xxx/PR (xxx=300-330, in steps of 5)
60 cells: JAM60S08-xxx/PR (xxx=300-330, in steps of 5)
60 cells: JAM60S10-xxx/PR (xxx=315-345, in steps of 5)
60 cells: JAM60S10-xxx/MR (xxx=325-355, in steps of 5)
60 cells: JAM60S10-xxx/BP (xxx=320-330, in steps of 5)
60 cells: JAM60S10-xxx/MB (xxx=330-345, in steps of 5)
60 cells: JAM60S17-xxx/PR (xxx=315-325, in steps of 5)
60 cells: JAM60S17-xxx/MR (xxx=315-355, in steps of 5)
78 cells: JAM78S10-xxx/MR (xxx=435-465, in steps of 5)
78 cells: JAM78S10-xxx/MR-J (xxx=435-465, in steps of 5)
66 cells: JAM66S10-xxx/MR (xxx=345-390, in steps of 5)

Maximum system voltage: 1000V or 1500V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types: **PV Modules with Mono-crystalline Silicon half-cut Solar Cells (166mm to 168mm):**

72 cells: JAM72S20-xxx/MR (xxx=430-470, in steps of 5)
72 cells: JAM72S20-xxx/MB (xxx=450-465, in steps of 5)
60 cells: JAM60S20-xxx/MR (xxx=355-390, in steps of 5)
60 cells: JAM60S21-xxx/MR (xxx=355-390, in steps of 5)
60 cells: JAM60S20-xxx/MB (xxx=375-390, in steps of 5)



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Maximum system voltage: 1000V or 1500V
Fuse rating: 20A
Application class: Class A
Electrical protection class: Class II

Module types:

PV Modules with 182mm Mono-crystalline Silicon half-cut Solar Cells:

72 cells: JAM72S30-xxx/MR (xxx=510-555, in steps of 5)
66 cells: JAM66S30-xxx/MR (xxx=470-505, in steps of 5)
60 cells: JAM60S30-xxx/MR (xxx=435-460, in steps of 5)
54 cells: JAM54S30-xxx/MR (xxx=390-415, in steps of 5)
78 cells: JAM78S30-xxx/MR (xxx=580-605, in steps of 5)
78 cells: JAM78S30-xxx/GR (xxx=575-600, in steps of 5)
72 cells: JAM72S30-xxx/GR (xxx=535-560, in steps of 5)
66 cells: JAM66S30-xxx/GR (xxx=500-510, in steps of 5)
60 cells: JAM60S30-xxx/GR (xxx=445-465, in steps of 5)
54 cells: JAM54S30-xxx/GR (xxx=400-420, in steps of 5)
72 cells: JAM72S31-xxx/MR (xxx=510-545, in steps of 5)
66 cells: JAM66S31-xxx/MR (xxx=470-500, in steps of 5)
60 cells: JAM60S31-xxx/MR (xxx=425-450, in steps of 5)
54 cells: JAM54S31-xxx/MR (xxx=385-405, in steps of 5)
78 cells: JAM78S31-xxx/GR (xxx=575-590, in steps of 5)
72 cells: JAM72S31-xxx/GR (xxx=525-545, in steps of 5)
66 cells: JAM66S31-xxx/GR (xxx=480-500, in steps of 5)
60 cells: JAM60S31-xxx/GR (xxx=435-450, in steps of 5)
54 cells: JAM54S31-xxx/GR (xxx=395-405, in steps of 5)
72 cells: JAM72S40-xxx/GR (xxx=545-570, in steps of 5)
66 cells: JAM66S40-xxx/GR (xxx=500-525, in steps of 5)
60 cells: JAM60S40-xxx/GR (xxx=455-475, in steps of 5)
54 cells: JAM54S40-xxx/GR (xxx=410-430, in steps of 5)
72 cells: JAM72S41-xxx/GR (xxx=540-570, in steps of 5)
66 cells: JAM66S41-xxx/GR (xxx=495-525, in steps of 5)
60 cells: JAM60S41-xxx/GR (xxx=450-475, in steps of 5)
54 cells: JAM54S41-xxx/GR (xxx=405-430, in steps of 5)

Maximum system voltage: 1000V or 1500V
Fuse rating: 25A
Application class: Class A
Electrical protection class: Class II



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Module types: **PV Modules with 210mm Mono-crystalline Silicon 1/3-cut Solar Cells:**
50 cells: JAM50S40-xxx/MR (xxx=490-500, in steps of 5)

Maximum system voltage: 1000V or 1500V

Fuse rating: 25A

Application class: Class A

Electrical protection class: Class II

Module types: **PV Modules with 182mm Mono-crystalline Silicon 1/5-cut Solar Cells:**
68 cells: JAM68S11-xxx/PR (xxx=355-365, in steps of 5)
68 cells: JAM68S11-xxx/PR(B) (xxx=345-365, in steps of 5)
76 cells: JAM76S11-xxx/PR(B) (xxx=395-415, in steps of 5)

Maximum system voltage: 1000V or 1500V

Fuse rating: 25A

Application class: Class A

Electrical protection class: Class II

Module types: **PV Modules with Poly-crystalline Silicon Solar Cells (156mm to 158.75mm):**
72 cells: JAP72S01-xxx/SC (xxx=310-345, in steps of 5)
72 cells: JAP72S02-xxx/SC (xxx=310-345, in steps of 5)
72 cells: JAP72S01-xxx/PR (xxx=330-345, in steps of 5)
72 cells: JAP72S02-xxx/PR (xxx=330-345, in steps of 5)
72 cells: JAP72S09-xxx/SC (xxx=320-345, in steps of 5)
72 cells: JAP72S01-xxx/MS (xxx=325-340, in steps of 5)
60 cells: JAP60S01-xxx/SC (xxx=255-290, in steps of 5)
60 cells: JAP60S02-xxx/SC (xxx=255-290, in steps of 5)
60 cells: JAP60S01-xxx/PR (xxx=275-285, in steps of 5)
60 cells: JAP60S02-xxx/PR (xxx=275-285, in steps of 5)
60 cells: JAP60S09-xxx/SC (xxx=265-290, in steps of 5)
60 cells: JAP60S01-xxx/MS (xxx=270-280, in steps of 5)
54 cells: JAP54S01-xxx/SC (xxx=245-255, in steps of 5)

Maximum system voltage: 1000V or 1500V

Fuse rating: 20A

Application class: Class A



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Electrical protection class: Class II

Module types:

**PV Modules with Poly-crystalline Silicon half-cut Solar Cells
(156mm to 158.75mm):**

72 cells: JAP72S03-xxx/PR (xxx=335-355, in steps of 5)

72 cells: JAP72S03-xxx/SC (xxx=320-345, in steps of 5)

72 cells: JAP72S10-xxx/SC (xxx=335-350, in steps of 5)

72 cells: JAP72S03-xxx/MS (xxx=320-345, in steps of 5)

72 cells: JAP72S08-xxx/SC (xxx=320-345, in steps of 5)

72 cells: JAP72S08-xxx/PR (xxx=335-355, in steps of 5)

60 cells: JAP60S03-xxx/PR (xxx=280-295, in steps of 5)

60 cells: JAP60S03-xxx/SC (xxx=270-290, in steps of 5)

60 cells: JAP60S10-xxx/SC (xxx=275-290, in steps of 5)

60 cells: JAP60S03-xxx/MS (xxx=270-285, in steps of 5)

60 cells: JAP60S08-xxx/SC (xxx=270-290, in steps of 5)

60 cells: JAP60S08-xxx/PR (xxx=280-295, in steps of 5)

Maximum system voltage: 1000V or 1500V

Fuse rating: 20A

Application class: Class A

Electrical protection class: Class II

Remark:

For detailed product information, please refer to CDF (Constructional Data Form) in Annex 1 of test report.



TÜV NORD CERT GmbH
Certification Body
Consumer Products